



## EMC TEST REPORT

For

Novo Digital Kft.

LED Power Supply

Test Model: SCH-300-24

Additional Models : please refer to Model list

Prepared for : Novo Digital Kft.  
Address : Egressy út 113/JK A. ép. 4. em. 6.1141 Budapest, Hungary

Prepared by : Shenzhen Southern LCS Compliance Testing Laboratory Ltd.  
Address : 101-201, No.39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China

Tel : (+86)755-29871520  
Fax : (+86)755-29871521  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com



Date of receipt of test sample : May 10, 2023  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : May 10, 2023 - May 16, 2023  
Date of Report : September 12, 2023





### EMC TEST REPORT

**EN IEC 55015:2019+A11:2020**

Emission - Electrical lighting and similar equipment

**EN 61547:2009**

Equipment for general lighting purposes - EMC immunity requirements

Report Reference No ..... : **LCSB050523038E001**

Date of Issue..... : September 12, 2023

Testing Laboratory Name..... : **Shenzhen Southern LCS Compliance Testing Laboratory Ltd.**

Address..... : 101-201, No.39 Building,Xialang Industrial Zone, Heshuikou Community, Matian Street,Guangming District, Shenzhen, China.

Testing Procedure..... : Full application of Harmonised standards   
Partial application of Harmonised standards   
Other standard testing method

Applicant's Name ..... : **Novo Digital Kft.**

Address..... : Egressy út 113/JK A. ép. 4. em. 6.1141 Budapest, Hungary .

**Test Specification:**

Standard ..... : EN IEC 55015:2019+A11:2020  
EN IEC 61000-3-2:2019+A1:2021  
EN 61000-3-3:2013+A1:2019+A2:2021  
EN 61547:2009

Test Report Form No. .... : SLCSEMC-2.3

TRF Originator ..... : Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2016-08

**Shenzhen Southern LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Southern LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Southern LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Equipment Under Test..... : **LED Power Supply**

Trademark ..... : **Scharfer**

Test Model/Type ..... : SCH-300-24

Rating ..... : See Model list

Results ..... : **PASS**

**Compiled by:**

*Ella Huang*

Ella Huang / Engineer

**Supervised by:**

*Amy Liu*

Amy Liu / Technique Director



Dm Gu / Manager



151611



## EMC - TEST REPORT

Test Report No.....: **LCSB050523038E001**

**Applicant.....: Novo Digital Kft.**  
Address.....: Egressy út 113/JK A. ép. 4. em. 6.1141 Budapest, Hungary  
Telephone.....:  
Fax.....: /

BC  
CE  
/E

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.







### ENVIRONMENTAL CONDITIONS

The climatic conditions during the test are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. the climatic conditions during the test were in the following Limits:

Ambient temperature	15°C - 30°C
Relative Humidity air	30% - 60%
Atmospheric pressure	86 kPa - 106 kPa

Climate values will be recorded and recorded separately if specifically required in the base standard or application product/product series standard.

### POSSIBLE TEST CASE VERDICTS

Test cases does not apply to test object	N/A
Test object does meet requirement	P(Pass) / PASS
Test object does not meet requirement	F(Fail) / FAIL
Not measured	N/M

### DEFINITION OF SYMBOLS USED IN THIS TEST REPORT

- Indicate that the conditions, standards or equipment listed is applicable to this report / test / EUT.
- Indicate that the conditions, standards or equipment listed is not applicable to this report / test / EUT.

### REVISION HISTORY

Revision	Issue Date	Revision Content	Revised by
000	May 16, 2023	Initial Issue	-
001	September 12, 2023	Revised Issue	

Remark:

001: Declared by applicant, require to re-sign the test report, "Date of issue" is replaced from "May 16, 2023" by "September 12, 2023", other information and results contained in this report are not changed, original test report become invalid.







## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION.....</b>	<b>6</b>
1.1. General Description of The Item(s).....	6
1.2. Operating Mode(s) Used of Tests.....	7
1.3. Support / Auxiliary Equipment for The EUT .....	7
1.4. Description of Test Facility.....	7
<b>2. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>3. MEASURING DEVICES AND TEST EQUIPMENT .....</b>	<b>9</b>
<b>4. VERDICT SUMMARY SECTION .....</b>	<b>11</b>
4.1. Standard(s).....	11
4.2. Overview of Results.....	12
<b>5. EMISSION TESTS .....</b>	<b>13</b>
5.1. Conducted Disturbance.....	13
5.2. Radiated Disturbance (9KHz - 30MHz).....	15
5.3. Radiated Disturbance (30MHz - 1GHz) .....	16
5.4. Harmonic Current.....	17
5.5. Voltage Fluctuations & Flicker .....	18
<b>6. IMMUNITY TESTS.....</b>	<b>19</b>
6.1. Performance Criteria .....	19
6.2. Electrostatic Discharge .....	20
6.3. Radio-Frequency Electromagnetic Fields.....	21
6.4. Electrical Fast Transient / Burst .....	22
6.5. Injected Currents (Radio-Frequency Common Mode) .....	23
6.6. Surge.....	24
6.7. Voltage Dips and Short Interruptions.....	25
<b>ANNEX A - TEST RESULTS .....</b>	<b>26</b>
<b>ANNEX B - TEST PHOTOS .....</b>	<b>42</b>
<b>ANNEX C - EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</b>	<b>47</b>

//COPY//





## 1. GENERAL INFORMATION

### 1.1. GENERAL DESCRIPTION OF THE ITEM(S)

Equipment Under Test	LED Power Supply
Test Model/Type	SCH-300-24
Additional Models/Type	See Model list
Description of Model difference	See Model list
Rating	See Model list
Non-restricted ELV lamps	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

#### Model List:

Declared by applicant as follows:

- All models of drives use the same circuit and PCB layout.
- All models have similar appearance and structure except power.
- This report after information review and verification, the model "SCH-300-24" were chosen as the representative model to perform all the tests.

Model	Input Voltage (AC,V)	Output:voltage (DC, V)	Output Ampere (A)	Output Wattage (W)
SCH-18-12	100-250V	12V	1.5A	18W
SCH-20-12	185-250V	12V	1.67A	20W
SCH-30-12	185-250V	12V	2.5A	30W
SCH-45-12	185-250V	12V	3.75A	45W
SCH-60-12	185-250V	12V	5A	60W
SCH-100-12	170-250V	12V	8.33A	100W
SCH-150-12	200-250V	12V	12.5A	150W
SCH-200-12	190-250V	12V	16.7A	200W
SCH-300-12	190-250V	12V	25A	300W
SCH-18-24	100-250V	24V	0.75A	18W
SCH-20-24	185-250V	24V	0.83A	20W
SCH-30-24	185-250V	24V	1.25A	30W
SCH-45-24	200-250V	24V	1.875A	45W
SCH-60-24	200-250V	24V	2.5A	60W
SCH-100-24	170-250V	24V	4.17A	100W
SCH-150-24	200-250V	24V	6.25A	150W
SCH-200-24	190-250V	24V	8.33A	200W
<b>SCH-300-24</b>	190-250V	24V	12.5A	300W



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



**1.2. OPERATING MODE(S) USED OF TESTS**

During the tests, the following operating mode(s) has(have) been used.

Operating Mode	Operating Mode description	Used for testing	
		Emission	Immunity
1	Lighting on mode	<input type="checkbox"/>	<input type="checkbox"/>
2	Maximum light	<input type="checkbox"/>	<input type="checkbox"/>
3	Minimum light	<input type="checkbox"/>	<input type="checkbox"/>
4	Full load	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

**1.3. SUPPORT / AUXILIARY EQUIPMENT FOR THE EUT**

EUT has been tested using the following auxiliary equipment :

Auxeq	Model/Type	Manufacturer	Supplied by
--			

**1.4. DESCRIPTION OF TEST FACILITY**

Test Location 1	Shenzhen Southern LCS Compliance Testing Laboratory Ltd. 101-201, No.39 Building,Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China. CNAS Registration Number is L10160.
Test Location 2	Shenzhen LCS Compliance Testing Laboratory Ltd. 101, 201 Building A and 301 Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, Guangdong, China. NVLAP Accreditation Code is 600167-0. CNAS Registration Number is L4595.
Date of receipt of test item	May 10, 2023
Date(s) of performance of test	May 10, 2023 - May 16, 2023



Note: Radio-Frequency Electromagnetic Field (RS) Test Subcontract to Shenzhen LCS Compliance Testing Laboratory Ltd for Testing.







## 2. STATEMENT OF THE MEASUREMENT UNCERTAINTY

The data and results referenced in this document are true and accurate. the reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. the measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods - Part 4: Uncertainty in EMC Measurements" and is documented in the LCS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. the manufacturer has the sole responsibility of continued compliance of the device.

Measurement	Uncertainty ( $U_{lab}$ )	Uncertainty ( $U_{cispr}$ )
Conducted disturbance (9kHz - 150kHz)	$\pm 1.40$ dB	$\pm 4.0$ dB
Conducted disturbance (150kHz - 30MHz)	$\pm 2.80$ dB	$\pm 3.6$ dB
Magnetic field disturbance (9kHz - 150kHz)	$\pm 3.46$ dB	-
Magnetic field disturbance (150kHz - 30MHz)		
Radiated disturbance (30MHz - 200MHz)	$\pm 4.66$ dB	$\pm 5.2$ dB
Radiated disturbance (200MHz - 1GHz)	$\pm 4.64$ dB	$\pm 5.0$ dB

### Supplementary information:

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

15161611





### 3. MEASURING DEVICES AND TEST EQUIPMENT

CONDUCTED DISTURBANCE						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	No. 1 shielded Room	CHENGYU	843	/	2023-04-26	2026-04-25
2	EMI Test Receiver	R&S	ESCI	101142	2023-04-26	2024-04-25
3	10dB Attenuator	SCHWARZBECK	VTSD9561-F	9561-F159	2023-04-26	2024-04-25
4	Artificial Mains Network	SCHWARZBECK	NSLK8127	8127716	2023-04-26	2024-04-25
5	Impedance Stabilization Network	SCHWARZBECK	NTFM 8158	NTFM8158#120	2023-04-26	2024-04-25
6	Voltage Probe	SCHWARZBECK	KT 9420	9420401	2023-04-26	2024-04-25
7	EMI Test Software	EZ	EZ_EMG	N/A	/	/

RADIATED DISTURBANCE (9KHz - 30MHz)						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	No. 1 shielded Room	CHENGYU	843	/	2023-04-26	2026-04-25
2	EMI Test Receiver	R&S	ESCI	101142	2023-04-26	2024-04-25
3	10dB Attenuator	SCHWARZBECK	VTSD9561-F	9561-F159	2023-04-26	2024-04-25
4	Triple-loop Antenna	EVERFINE	LLA-2	11050003	2023-04-26	2024-04-25
5	EMI Test Software	EZ	EZ_EMG	N/A	/	/

RADIATED DISTURBANCE (above 30MHz)						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2021-05-28	2024-05-29
2	EMI Test Receiver	R&S	ESCI3	101010	2023-04-26	2024-04-25
3	Log-periodic Antenna	SCHWARZBECK	VULB9163	5094	2022-05-08	2025-05-07
4	Coupling Decoupling Network	SCHWARZBECK	CDNE M2	00251	2023-04-26	2024-04-25
5	Coupling Decoupling Network	SCHWARZBECK	CDNE M3	00248	2023-04-26	2024-04-25
6	EMI Test Software	EZ	EZ_EMG	N/A	/	/
7	Controller system	SKET	SKC1000	N/A	/	/

HARMONIC CURRENT & FLICKER						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Harmonic Current and Flicker Test System	HTEC	AC2000A	/	2023-04-26	2024-04-25
2	Linear variable frequency power supply	HTEC	HHF-5010	/	2023-04-26	2024-04-25

ELECTROSTATIC DISCHARGE						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	ESD Simulator	TESEQ	NSG 437	1615	2023-03-20	2024-03-19

ELECTRICAL FAST TRANSIENT / BURST						
Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date







1	Electrical Fast Transient Generator	HTEC	HEFT51	162201	2023-04-26	2024-04-25
2	EFT Coupling Clamp	HTEC	H3C	163701	2023-04-26	2024-04-25

**SURGE**

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Surge Generator	3CTEST	SG5006G	EC5581070	2023-04-26	2024-04-25
2	Coupling / Decoupling network	3CTEST	SGN-5010G	EC5591033	2023-04-26	2024-04-25

**INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE)**

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	No. 2 shielded room	CHENGYU	743	/	2023-04-26	2026-04-25
2	Conducted Susceptibility Generator	HTEC	CDG6000	126A140012016	2023-04-26	2024-04-25
3	CDN	HTEC	CDN-M2+M3	A22/0382/2016	2023-04-26	2024-04-25
4	6dB attenuator	HTEC	ATT6	HA1601	2023-04-26	2024-04-25
5	Electromagnetic clamp	LUTHI	EM101	35535	2023-04-26	2024-04-25

**POWER FREQUENCY MAGNETIC FIELD**

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Frequency Mag-Field Generator System	HTEC	HPFMF100	100-2400	2023-04-26	2024-04-25

**VOLTAGEDIPS AND SHORT INTERRUPTIONS**

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Voltage Dips and up Generator	HTEC	HPFS161P	162202	2023-04-26	2024-04-25

**RADIO-FREQUENCY ELECTROMAGNETIC FIELDS**

Item	Test equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	ESG Vector Signal Generator	Agilent	E4438C	MY42081396	2022-06-06	2023-06-05
2	RF POWER AMPLIFIER	OPHIR	5225R	1052	2022-06-16	2023-06-15
3	RF POWER AMPLIFIER	OPHIR	5273F	1019	2022-06-16	2023-06-15
4	Stacked Broadband Log Periodic Antenna	SCHWARZBECK	STLP 9128	9128ES-145	2022-06-19	2023-06-18
5	Stacked Mikrowellen Log.-Per Antenna	SCHWARZBECK	STLP 9149	9149-484	2022-06-19	2023-06-18
6	Electric field probe	Narda S.TS./PMM	EP601	611WX80208	2022-06-06	2023-06-05







## 4. VERDICT SUMMARY SECTION

This chapter present an overview of the standards and results. Refer the next chapter for details of measured test results and applied test levels.

### 4.1. STANDARD(S)

EN IEC 55015:2019+A11:2020 - Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.

EN 61547:2009 - Equipment for general lighting purposes — EMC immunity requirements.

EN IEC 61000-3-2:2019+A1:2021 - Electromagnetic compatibility (EMC) Part 3-2: Limits for harmonic current emissions (equipment input current  $\leq 16$  A per phase).

EN 61000-3-3:2013+A1:2019+A2:2021 - Electromagnetic compatibility (EMC)Part 3-3: Limits for voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current  $\leq 16$  A per phase and not subject to conditional connection.

101-201



Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.



## 4.2. OVERVIEW OF RESULTS

<b>EMISSION TESTS - EN IEC 55015, EN IEC 61000-3-2, EN 61000-3-3</b>		
<b>Requirement - Test case</b>	<b>Limit</b>	<b>Verdict</b>
Conducted Disturbance - electric power supply	Table 1, Table 4	PASS
Conducted Disturbance - wired network ports at other than power supply	Table 2, Table 3	N/A
Conducted Disturbance - local wired ports at other than electrical power supply interface of ELV lamp	Table 5, Table 6	N/A
Assessment of the enclosure port	---	---
Radiated Disturbance in the frequency range 9 kHz to 30 MHz	Table 8, Table 9	PASS
Radiated Disturbance in the frequency range 30 MHz to 1 GHz	Table 10	PASS
Harmonic Current	Clause 7	PASS
Voltage Fluctuations and Flicker <sup>2</sup>	Clause 5	N/A
<b>IMMUNITY TESTS - EN 61547</b>		
<b>Requirement - Test case</b>	<b>Basic Standard(s)</b>	<b>Verdict</b>
Electrostatic Discharge	IEC/EN 61000-4-2	PASS
Radio-Frequency Electromagnetic Fields	IEC/EN 61000-4-3	PASS
Electrical Fast Transient / Burst	IEC/EN 61000-4-4	PASS
Surge	IEC/EN 61000-4-5	PASS
Injected Currents (Radio-Frequency Common Mode)	IEC/EN 61000-4-6	PASS
Power Frequency Magnetic Field <sup>1</sup>	IEC/EN 61000-4-8	N/A
Voltage Dips and Short Interruptions	IEC/EN 61000-4-11	PASS

### Supplementary information:

- 1) Only need to be applied to equipment containing components susceptible to magnetic fields.
- 2) According to EN 61000-3-3:2013+A1:2019+A2:2021 Clause A.2, Incandescent lamp luminaires with ratings less than or equal to 1000W and discharge and LED lamp luminaires with ratings less than or equal to 600W, are deemed to comply with the standard and are not required to be tested.







## 5. EMISSION TESTS

### 5.1. CONDUCTED DISTURBANCE

Standard	EN IEC 55015:2019+A11:2020
Basic Standard(s)	EN 55016-2-1

#### Disturbance voltage limits at the electric power supply interface

Frequency range [MHz]	Limit: Quasi-peak [dB(μV)]	Limit: Average[dB(μV)]	IF BW
0,009 - 0,05	110	N/A	200 Hz
0,05 - 0,15	90 - 80	N/A	200 Hz
0,15 - 0,5	66 - 56	56 - 46	9 kHz
0,5 - 5,0	56	46	9 kHz
5,0 - 30	60	50	9 kHz

1) At the transition frequency, the lower limit applies.  
 2) The limit decreases linearly with the logarithm of the frequency in the ranges 50 kHz to 150 kHz and 150 kHz to 0,5 MHz.  
 3) If the EUT is non-restricted ELV lamps, the limits add 26dB.

#### Disturbance voltage limits at wired network interfaces other than power supply

Frequency range [MHz]	Limit: Quasi-peak [dB(μV)]	Limit: Average[dB(μV)]	IF BW
0,15 - 5,0	84 - 74	74 - 64	9 kHz
5,0 - 30	74	64	9 kHz

1) The limits decrease linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.  
 2) The disturbance voltage limits are derived for use with an artificial asymmetrical network (AAN) which presents a common mode (asymmetric mode) impedance of 150 Ω to the measured interface.

#### Disturbance current limits at wired network interfaces other than power supply

Frequency range [MHz]	Limit: Quasi-peak [dB(μA)]	Limit: Average[dB(μA)]	IF BW
0,15 - 5,0	40 - 30	30 - 20	9 kHz
5,0 - 30	30	20	9 kHz

1) The limits decrease linearly with the logarithm of the frequency in the range 0.15MHz to 0.5 MHz.

#### Disturbance voltage limits at local wired ports: local wired ports other than electrical power supply interface of ELV lamp


Frequency range [MHz]	Limit: Quasi-peak [dB(μV)]	Limit: Average[dB(μV)]	IF BW
0,15 - 5,0	80	70	9 kHz
5,0 - 30	74	64	9 kHz

1) At the transition frequency, the lower limit applies.





### Test configuration

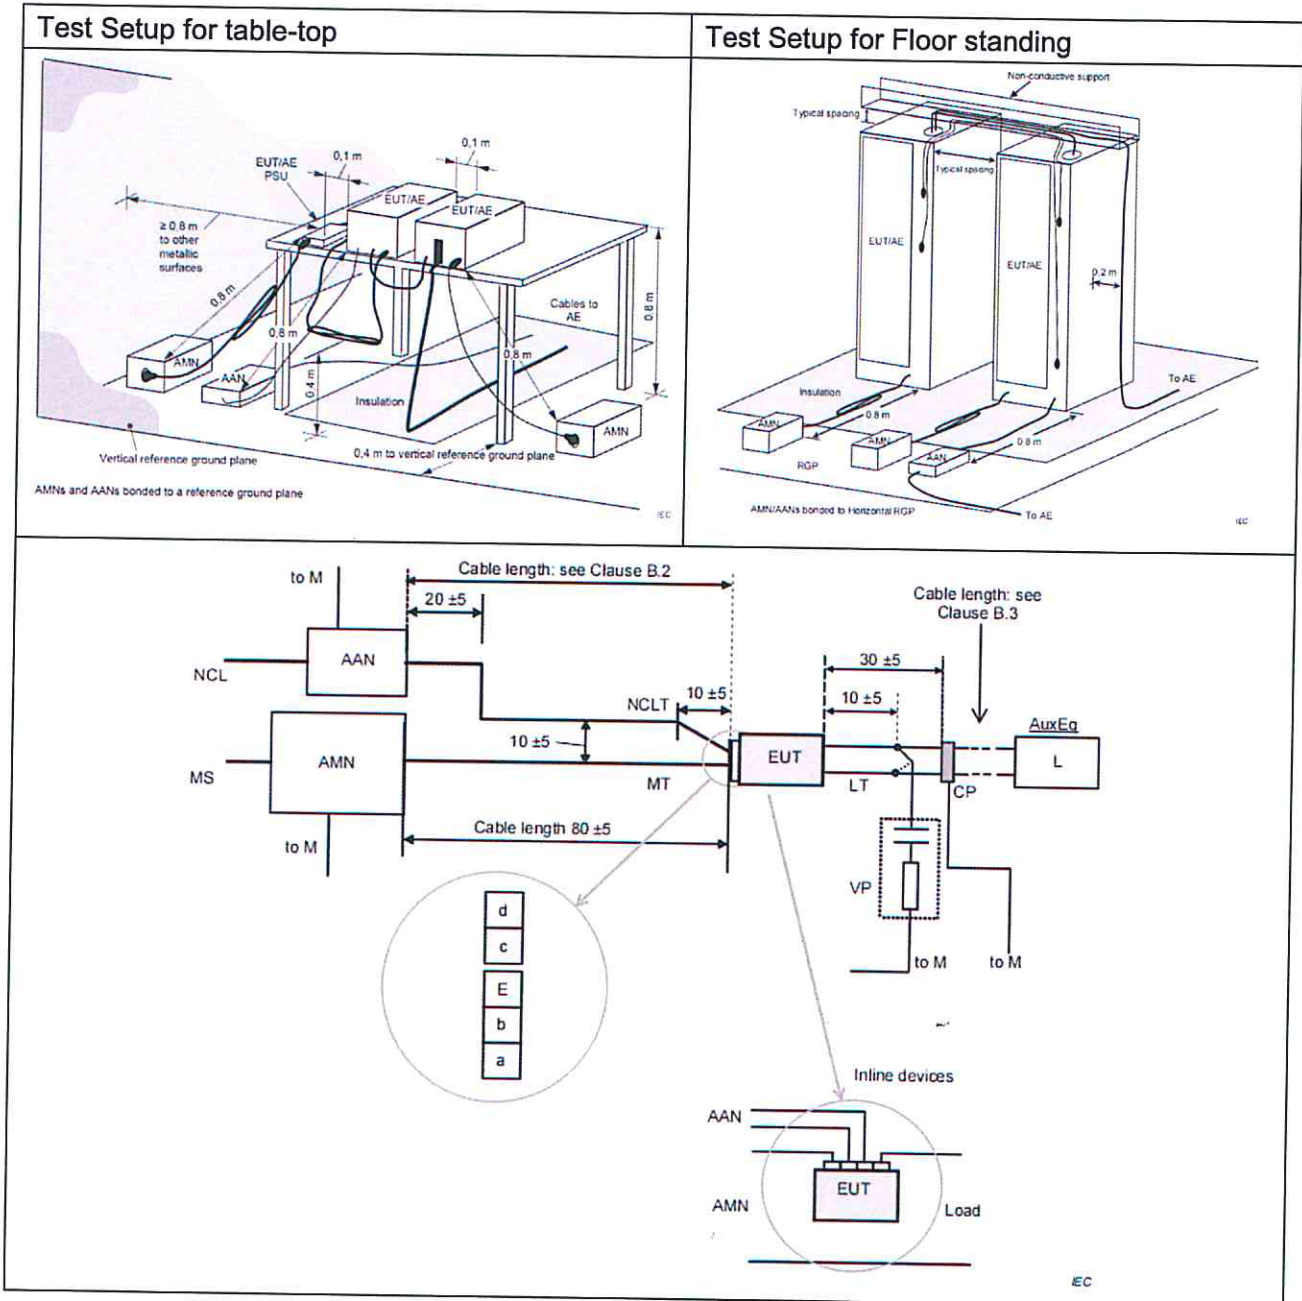

### Test Procedure Description

For Table-top, EUT shall be placed at  $(0,8 \pm 0,05)$  m above the reference plane of the test site selected for measurement. for Floor standing, EUT shall be placed at  $(0,12 \pm 0,04)$  m above the reference plane of the test site selected for measurement. and connected to the AC mains through artificial mains network (LISN). EUT is powered by V-type artificial power network, and the distance from LISN or ANN is 0,8m. the part of the EUT power cord exceeding 0,8m folds in parallel to form a 0,3-0,4 m eights harness.

Test Results refer to Annex A.1



1151611011

### 5.2. RADIATED DISTURBANCE (9KHz - 30MHz)


Standard	EN IEC 55015:2019+A11:2020
Basic Standard(s)	EN 55016-2-3
Test method	Large Loop Antenna (LLA)

#### LLAS Radiated disturbance limits (2m)

Frequency range [MHz]	Limit: Quasi-peak [dB(μA)]	IF BW
0,009 - 0,07	88	200 Hz
0,07 - 0,15	88 - 58	200 Hz
0,15 - 3,0	58 - 22	9 kHz
3,0 - 30	22	9 kHz

- 1) At the transition frequency the lower limit applies.
- 2) Decreasing linearly with logarithm of the frequency.

#### Test configuration

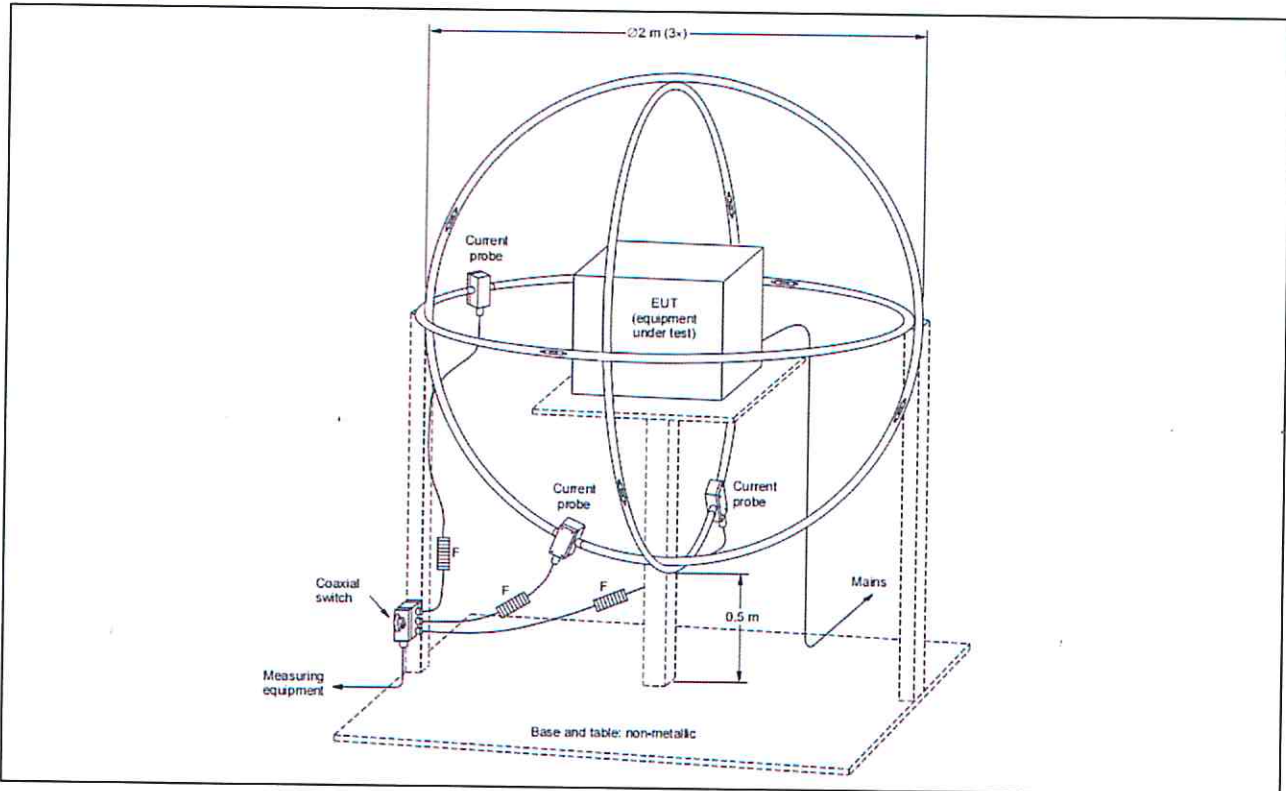

#### Test Procedure Description

The EUT is placed on a wood table in the center of a loop antenna. the induced current in the loop antenna is measured by means of a current probe and the test receiver. Three field components are checked by means of a coaxial switch.

Test Results refer to Annex A.2





### 5.3. RADIATED DISTURBANCE (30MHz - 1GHz)


Standard	EN IEC 55015:2019+A11:2020
Basic Standard(s)	EN 55016-2-3
Test method	Semi Anechoic Chamber (SAC)

#### SAC Radiated disturbance limit

Frequency range [MHz]	Limit: Quasi-peak [dB(μV/m)]		IF BW
	3 m distance	10 m distance	
30 - 230	40	30	120 KHz
230 - 1000	47	37	120 KHz

- 1) At the transition frequency, the lower limit applies.
- 2) Distance refers to the distance in meters between the measuring instrument antenna geometric center and the closed point of any part of the EUT.

#### Test configuration

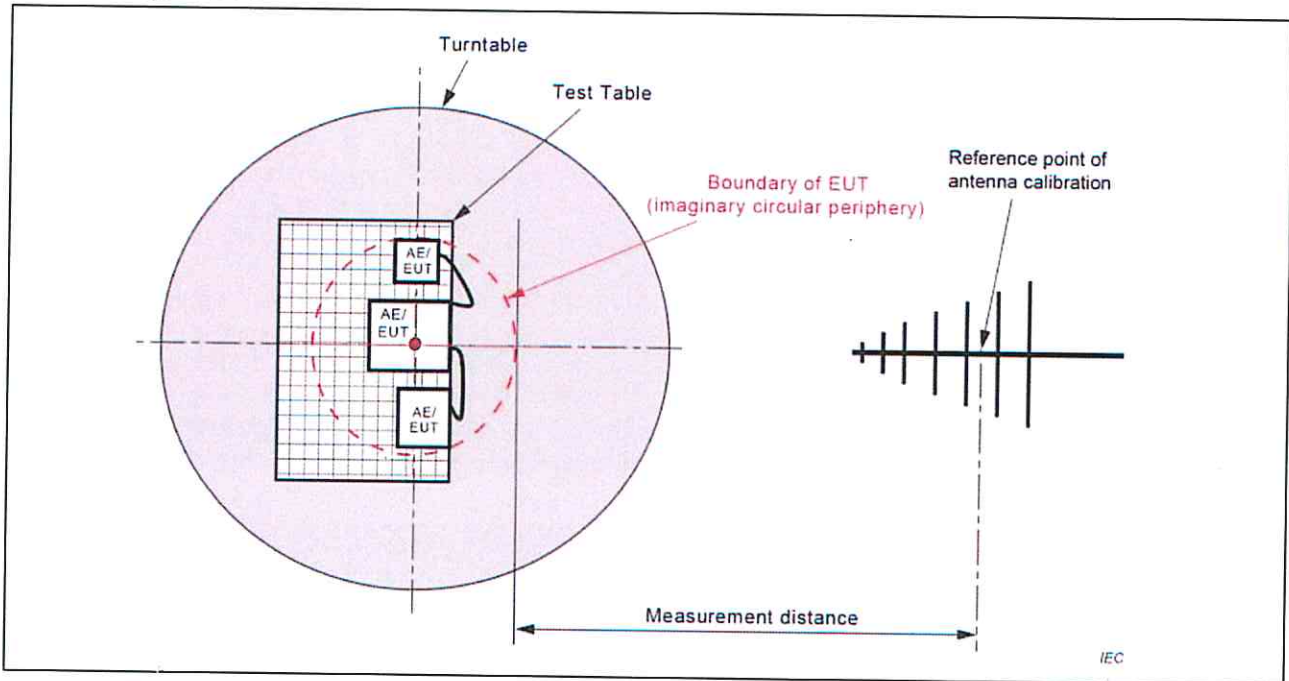

#### Test Procedure Description

The radiated disturbance test was conducted in a 3m Semi Anechoic Chamber and conforming to CISPR 16-2-3. the EUT is placed on a turntable, which is 0.8 meter high above the ground. the turntable can rotate 360 degrees to determine the position of the maximum emission level. the EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. the antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Log-periodic Antenna (calibrated by Dipole antenna) is used as a receiving antenna. both horizontal and vertical polarization of the antenna is set on test.

Test Results refer to Annex A.3








### 5.4. HARMONIC CURRENT

Standard	EN IEC 61000-3-2:2019+A1:2021	
Exclusions (For these categories of equipment, limits are not specified in the EN IEC 61000-3-2 )	<input type="checkbox"/>	Systems with nominal voltages less than 220V <sub>AC</sub> (line-to-neutral)
	<input type="checkbox"/>	Lighting equipment with rated power < 5 W
	<input type="checkbox"/>	Equipment with rated power of ≤ 75 W (other than lighting equipment)
	<input type="checkbox"/>	Professional equipment with a total rated power >1kW
	<input type="checkbox"/>	Symmetrically controlled heating elements with rated power ≤ 200 W
	<input type="checkbox"/>	Independent dimmers for incandescent lamps with rated power ≤ 1kW

Classification		
<input type="checkbox"/>	Class A	All equipment not specified as belonging to Class B, C or D
<input type="checkbox"/>	Class B	Portable tools
<input checked="" type="checkbox"/>	Class C	<input checked="" type="checkbox"/> Lighting equipment with active input power > 25W
		<input type="checkbox"/> Lighting equipment with active input power ≥ 5W and ≤ 25W
		<input type="checkbox"/> Table 3, column 2 (Power-related limits)
		<input type="checkbox"/> 3rd harmonic ≤ 86%, 5th harmonic ≤ 61% and waveform conditions
<input type="checkbox"/>	Class D	Personal computers, television receivers, refrigerators and freezers having one or more variable-speed drives to control compressor

LCSB050523038E001

### Test configuration

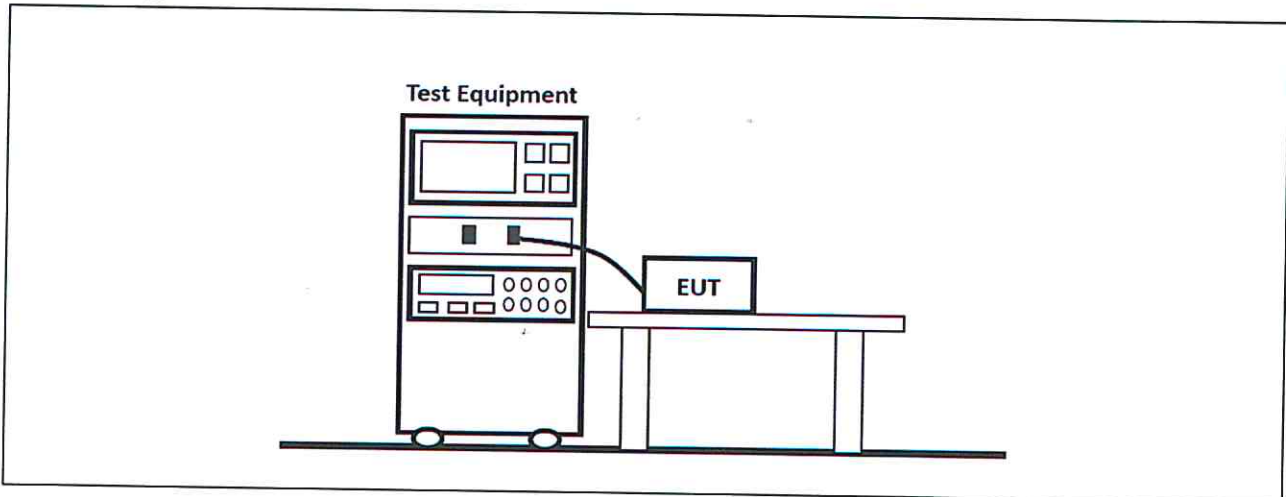

Test Results refer to Annex A.4






## 5.5. VOLTAGE FLUCTUATIONS & FLICKER

Standard	EN 61000-3-3:2013+A1:2019+A2:2021
----------	-----------------------------------

### Limit

P <sub>st</sub> (Short term flicker)	<input type="checkbox"/>	≤ 1	<input checked="" type="checkbox"/>	Not applicable
P <sub>lt</sub> (Long-term flicker)	<input type="checkbox"/>	≤ 0,65	<input checked="" type="checkbox"/>	Not applicable
T <sub>max</sub> (Accumulated time)	<input type="checkbox"/>	≤ 500 ms	<input checked="" type="checkbox"/>	Not applicable
d <sub>c</sub> (Relative voltage change)	<input type="checkbox"/>	≤ 3.3%	<input checked="" type="checkbox"/>	Not applicable
d <sub>max</sub> (Max.voltage change)	<input type="checkbox"/>	≤ 4%	<input type="checkbox"/>	≤ 6%
	<input type="checkbox"/>	≤ 7%	<input checked="" type="checkbox"/>	Not applicable

### Test configuration

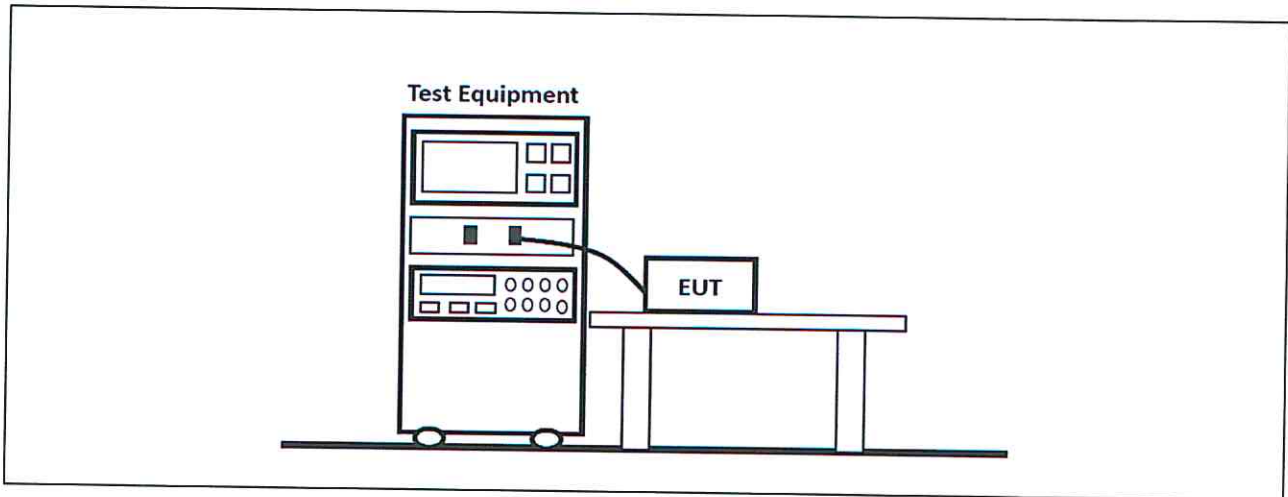

Shenzhen Southern LCS Compliance Testing Laboratory Ltd.

101-201, No. 39 Building, Xialang Industrial Zone, Heshuikou Community, Matian Street, Guangming District, Shenzhen, China.

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com.

Scan code to check authenticity.





## 6. IMMUNITY TESTS

### 6.1. PERFORMANCE CRITERIA

Standard	EN 61547:2009
----------	---------------

The performance of lighting equipment shall be assessed by monitoring:

- the luminous intensity of the luminaire or of the lamp(s).
- the functioning of the control in the case of equipment which includes a regulating control or concerns the regulating control itself.
- the functioning of the starting device, if any.

Performance criterion A: during the test, no change of the luminous intensity shall be observed and the regulating control, if any, shall operate during the test as intended.

Performance criterion B: during the test, the luminous intensity may change to any value. after the test, the luminous intensity shall be restored to its initial value within 1 min. regulating controls need not function during the test, but after the test, the mode of the control shall be the same as before the test provided that during the test no mode changing commands were given.

Performance criterion C: during and after the test, any change of the luminous intensity is allowed and the lamp(s) may be extinguished. after the test, within 30 min, all functions shall return to normal, if necessary by temporary interruption of the mains supply and / or operating the regulating control.

Electronic lighting equipment		Tests and performance criteria							
		5.2 (ESD)	5.3 (RS)	5.4 (PFMF)	5.5 (EFT)	5.6 (CS)	5.7 (Surge)	5.8 (Dips)	5.9 (Interruption)
<input type="checkbox"/>	Self-ballasted lamps	B	A	B	B	A	C	C	B
<input type="checkbox"/>	Independent auxiliaries	B	A	B	B	A	C	C	B <sup>1</sup>
<input checked="" type="checkbox"/>	Luminaire including active electronic components	B	A	B	B	A	C	C	B <sup>1</sup>
<input type="checkbox"/>	Luminaire for emergency lighting	B <sup>2</sup>	A	B	B <sup>2</sup>	A	B <sup>2</sup>	See <sup>3</sup>	See <sup>3</sup>

Supplementary information:

- 1) For ballasts where the lamp is not able to restart within 1 min, due to the physical constraints of the lamp, performance criterion C applies.
- 2) Luminaires for emergency lighting shall be tested in both the normal and emergency mode of operation.
- 3) These tests do not apply as they are covered by the test in IEC 60598-2-22.
- 4) For emergency luminaires designed to operate in high-risk task areas, after the test, the luminous intensity shall be restored to its initial value within 0,5 s.




## 6.2. ELECTROSTATIC DISCHARGE

Electrostatic discharge (ESD) is the result of accumulated static electricity from a person or object, for example, walking on a synthetic carpet. ESD can indirectly affect the operation of equipment or damage its electronic components through direct discharge or coupling. Both effects were simulated during the test. Contact discharge is the preferred test method. Twenty discharges (10 with positive and 10 with negative polarity) shall be applied on each accessible metallic part of the enclosure (terminals are excluded). Air discharges shall be used where contact discharges cannot be applied. Discharges shall be applied on the horizontal or vertical coupling planes.

### Requirements

Standard	EN 61547:2009				
Basic standard	EN 61000-4-2				
Port under test	Enclosure				
Contact discharge	<input checked="" type="checkbox"/> ± 2 kV	<input checked="" type="checkbox"/> ± 4 kV	<input type="checkbox"/> ±8 kV	<input type="checkbox"/> ±15 kV	
Air discharge	<input checked="" type="checkbox"/> ± 2 kV	<input checked="" type="checkbox"/> ± 4 kV	<input checked="" type="checkbox"/> ±8 kV	<input type="checkbox"/> ±15 kV	
Number of discharges	≥ 10 per polarity with ≥ 1 sec interval				

### Test configuration

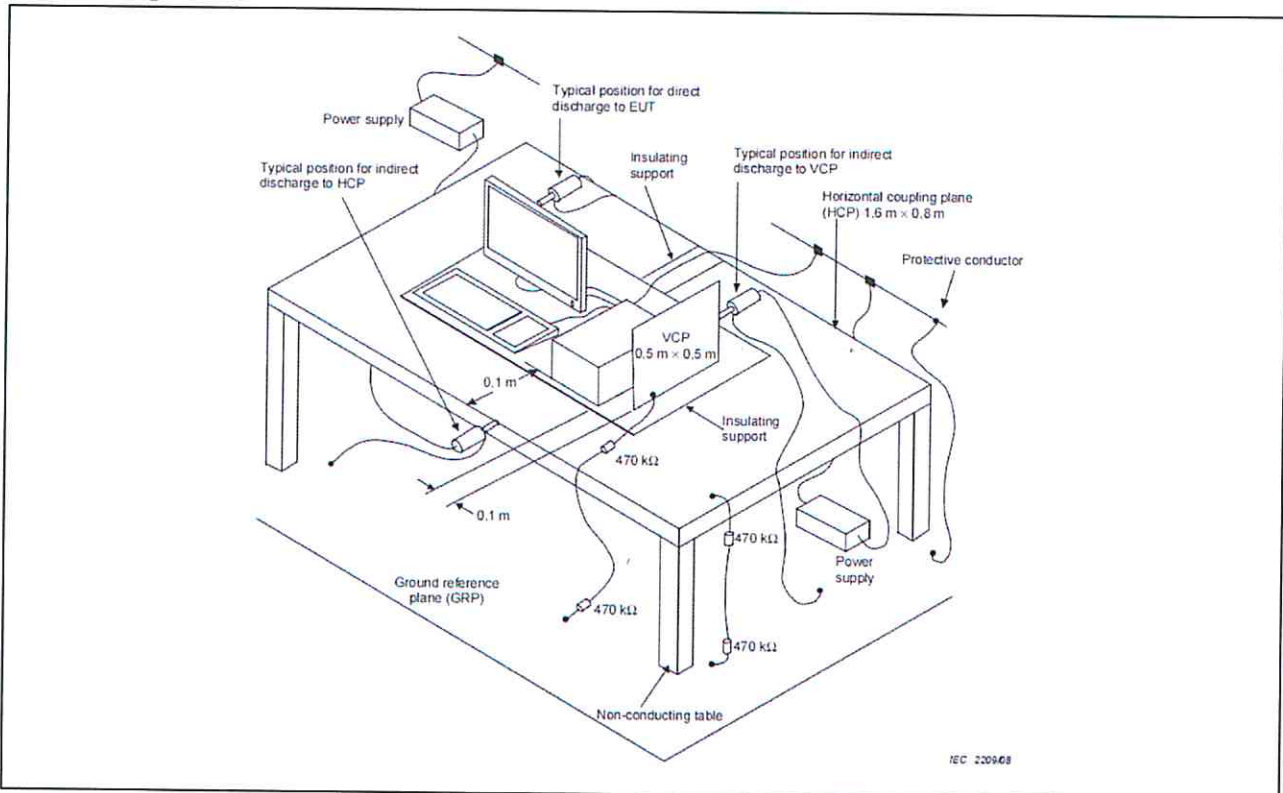

Test Results refer to Annex A.5





### 6.3. RADIO-FREQUENCY ELECTROMAGNETIC FIELDS

During the test it is verified if the EUT has sufficient immunity against radiated electromagnetic fields.


The test was carried out in a half-wave anechoic chamber with absorbent material attached to a reflective ground plane. Before the test, the test field strength needs to be calibrated. during the calibration, the corresponding relationship between the target field strength and the forward power applied to the transmitting antenna is established. during the test, except for EUT, the indoor layout is consistent with the calibration.

The EUT and its simulators are placed on a turn table which is 0,8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. both horizontal and vertical polarization of the antenna are set on test. each of the four sides of EUT must be faced this transmitting antenna and measured individually. in order to judge the EUT performance, a CCD camera is used to monitor EUT screen.

#### Requirements

Standard	EN 61547:2009			
Basic standard	EN 61000-4-3			
Port under test	Enclosure			
Frequency range	Test level	Modulation	Dwell time	Step size
80 - 1000 MHz	3 V/m	1 kHz, 80 % AM	≥ 0,5 s	≤ 1%

#### Test configuration

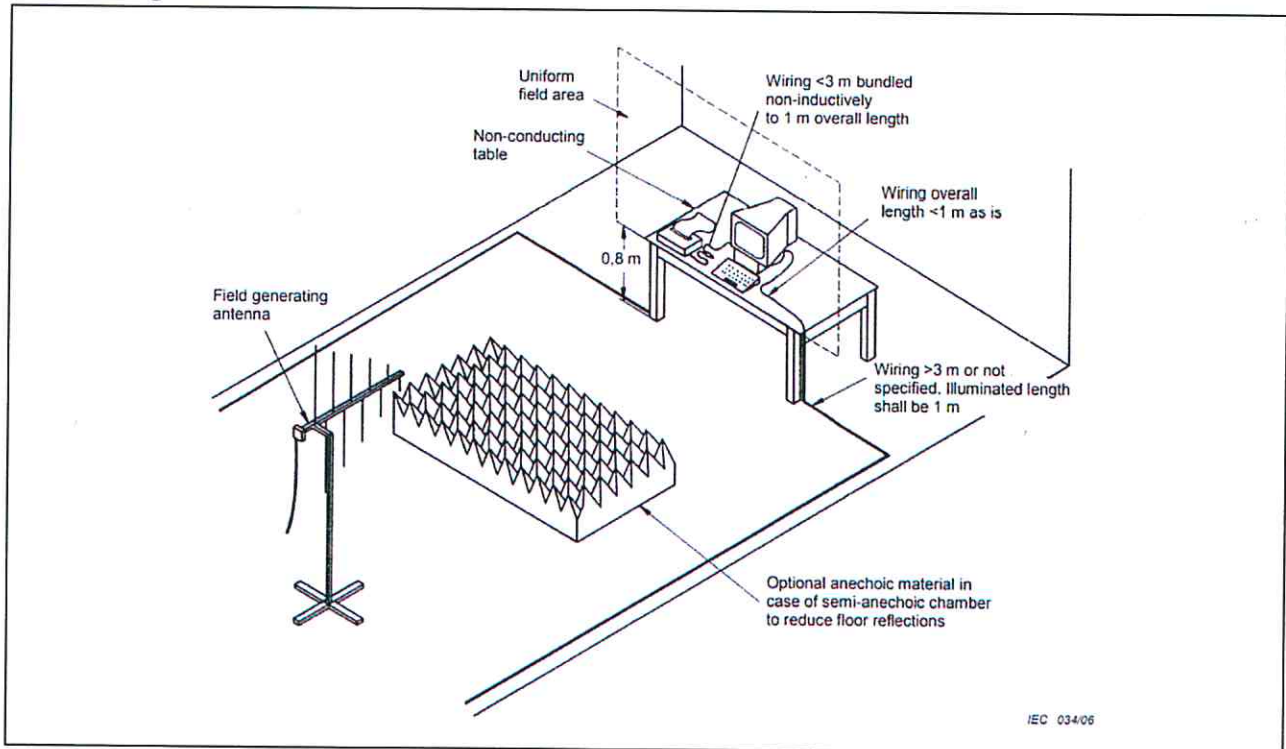

Test Results refer to Annex A.5



### 6.4. ELECTRICAL FAST TRANSIENT / BURST

The EFT immunity test simulates the disturbances by caused of very short transient bursts.


The EUT is put on the Insulating support which is 0.1 meter high above the ground reference plane. the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5 m. both polarities of the test voltage should be applied during test, fast transients are carried out with a minimum duration of 2 min with a positive polarity and a minimum of 2 min with a negative polarity.

#### Requirements

Standard	EN 61547:2009		
Basic standard	EN 61000-4-4		
Pulse characteristics	5/50 ns		
Port under test	Test level	Repetition frequency	Duration
<input checked="" type="checkbox"/> AC input / output power	$\pm 1000\text{ V}$	5 kHz	2 min / polarity
<input type="checkbox"/> DC input / output power <sup>2</sup>	$\pm 500\text{ V}$	5 kHz	2 min / polarity
<input type="checkbox"/> Signal / Control port <sup>1 3</sup>	$\pm 500\text{ V}$	5 kHz	2 min / polarity

1) Only applicable to ports interfacing with cables whose whose total length may exceed 3 m.  
 2) Not applicable to equipment not connected to the mains while in use.  
 3) Change of state commands are not applied during the test.

#### Test configuration

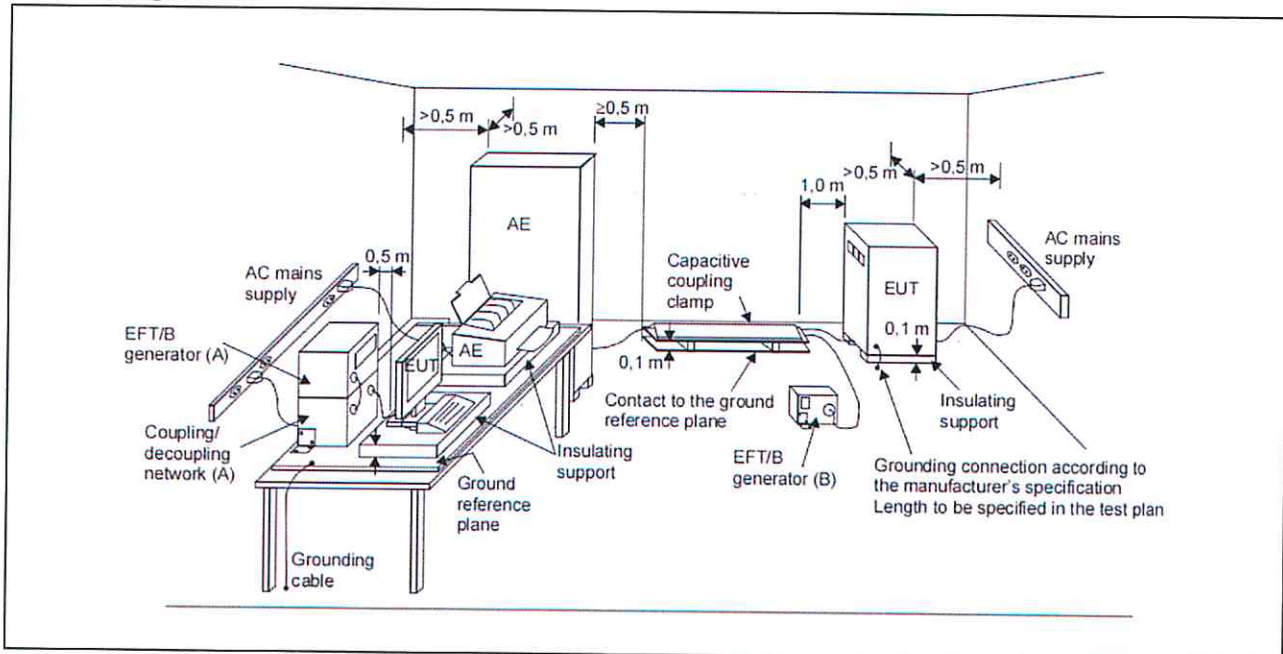

Test Results refer to Annex A.5





### 6.5. INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE)

During the test the immunity of the EUT for conducted electromagnetic fields is checked .


The equipment to be tested is placed on an insulating support of 0,1 m ± 0,05 m height above a reference ground plane. a non conductive roller / caster in the range of 0,1 m ± 0,05 m above the reference ground plane can be used as an alternative to an insulating support. all cables exiting the EUT shall be supported at a height of at least 30 mm above the reference ground plane. The coupling and decoupling devices shall be placed on the reference ground plane, making direct contact with it at a distance of 0,1 m to 0,3 m from the EUT.

#### Requirements

Standard		EN 61547:2009			
Basic standard		EN 61000-4-6			
Frequency range		0,15 - 80 MHz			
Port under test		Test level	Modulation	Dwell time	Step size
<input checked="" type="checkbox"/>	AC input / output power	3 V	1 kHz, 80 % AM	≥ 0,5 s	≤ 1%
<input type="checkbox"/>	DC input / output power <sup>1</sup>	3 V	1 kHz, 80 % AM	≥ 0,5 s	≤ 1%
<input type="checkbox"/>	Signal / Control port <sup>2</sup>	3 V	1 kHz, 80 % AM	≥ 0,5 s	≤ 1%

1) Not applicable to equipment not connected to the mains while in use.  
 2) Only applicable to ports interfacing with cables whose whose total length may exceed 3 m.

#### Test configuration

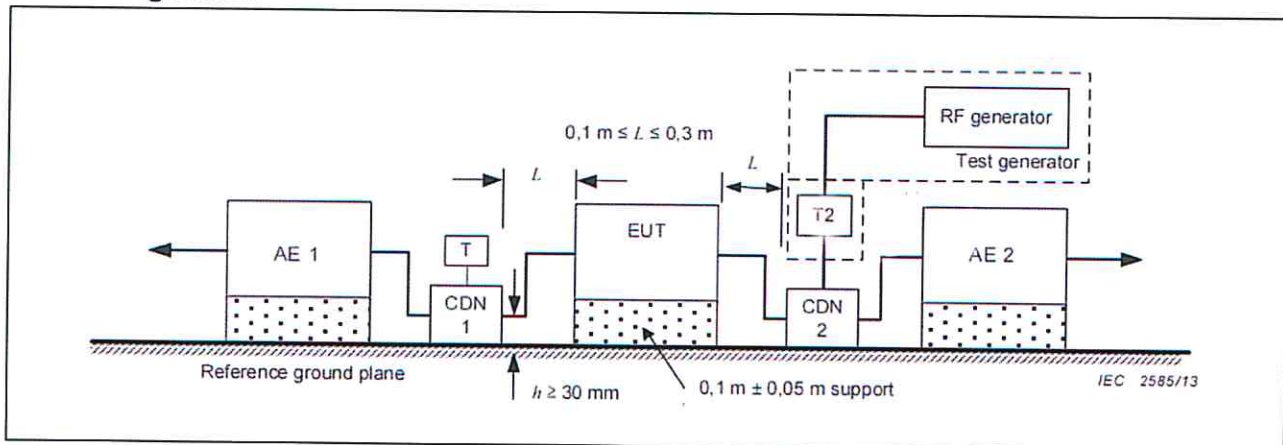

Test Results refer to Annex A.5





### 6.6. SURGE

The surge immunity test simulates unidirectional surges caused by overvoltages from switching and lightning transients.


The surge is applied to the EUT power supply terminal via the capacitive coupling network, to the EUT power supply provide a 1,0 kV 1,2/50us voltage surge (at open-circuit condition), at least 5 positive and 5 negative tests with 1 min or less repetition rate are conducted during test. and phase angles is 90° and 270°.

#### Requirements

Standard		EN 61547:2009			
Basic standard		EN 61000-4-5			
Pulse wave-shape		1,2/50 $\mu$ s			
Repetition rate		1 per minute or faster			
Number of pulses		5 pulses (at each polarity and phase angles)			
Classification		Port under test	Test Level	Coupling	Phase angle
☒	Luminaires and independent auxiliaries Input power >25W	AC input power	+ 1 kV	line - line	90°
			- 1 kV	line - line	270°
		AC input power	+ 2 kV	line - ground	90°
			- 2 kV	line - ground	270°
☐	Luminaires and independent auxiliaries Input power $\leq$ 25W	AC input power	+ 0,5 kV	line - line	90°
			- 0,5 kV	line - line	270°
		AC input power	+ 1 kV	line - ground	90°
			- 1 kV	line - ground	270°
☐	Self-ballasted lamps and semi-luminaires	AC input power	+ 0,5 kV	line - line	90°
			- 0,5 kV	line - line	270°
		AC input power	+ 1 kV	line - ground	90°
			- 1 kV	line - ground	270°

1) In addition to the specified test level, all lower test levels as detailed in EN 61000-4-5 should also be satisfied.

#### Test configuration

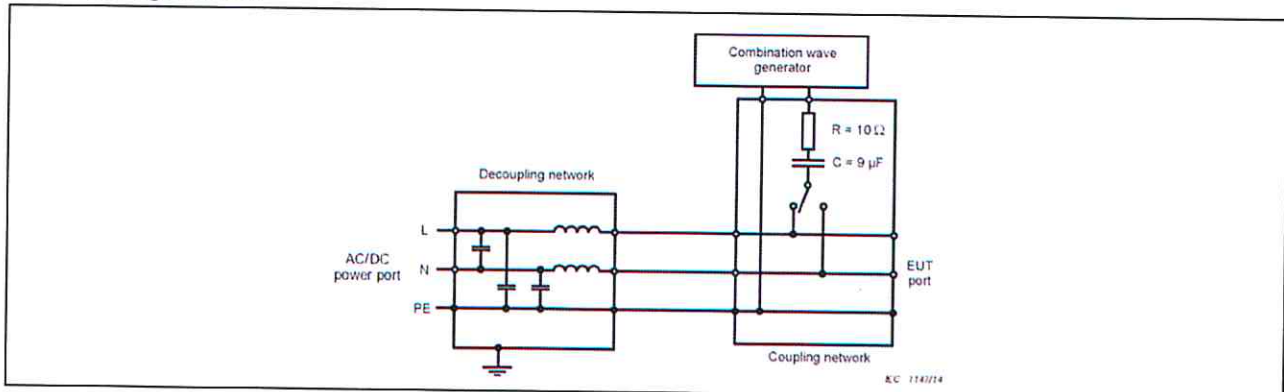

Test Results refer to Annex A.5







### 6.7. VOLTAGE DIPS AND SHORT INTERRUPTIONS

The surge immunity test is simulates Voltage dips and short interruptions occur due to faults in a (public or non-public) network or in installations by sudden changes of large loads.

The EUT shall be connected to the test generator for testing using the shortest power cable specified by the EUT manufacturer and, if no cable length is specified, the shortest cable suitable for the EUT, each representative mode of operation shall be tested. for short interruptions to use 0° for one of the phases.


#### Requirements

Standard	EN 61547:2009		
Basic standard	EN 61000-4-11		
# of dips / interruptions	3 dips / interruptions for each test level and phase angle		
Intervals between events	≥ 10 s		
Port under test	Test level <sup>1</sup>	Number of periods (cycles)	
		50Hz	60Hz
AC input power	70% of U <sub>NOM</sub>	10	12
	0% of U <sub>NOM</sub>	0,5	0,5

- 1) Where the equipment has a rated voltage range the following shall apply:
- If the voltage range does not exceed 20 % of the lower voltage specified for the rated voltage range, a single voltage within that range may be specified as a basis for the test level specification.
  - in all other cases, the test procedure shall be applied for both the lowest and highest voltages declared in the voltage range.



#### Test configuration

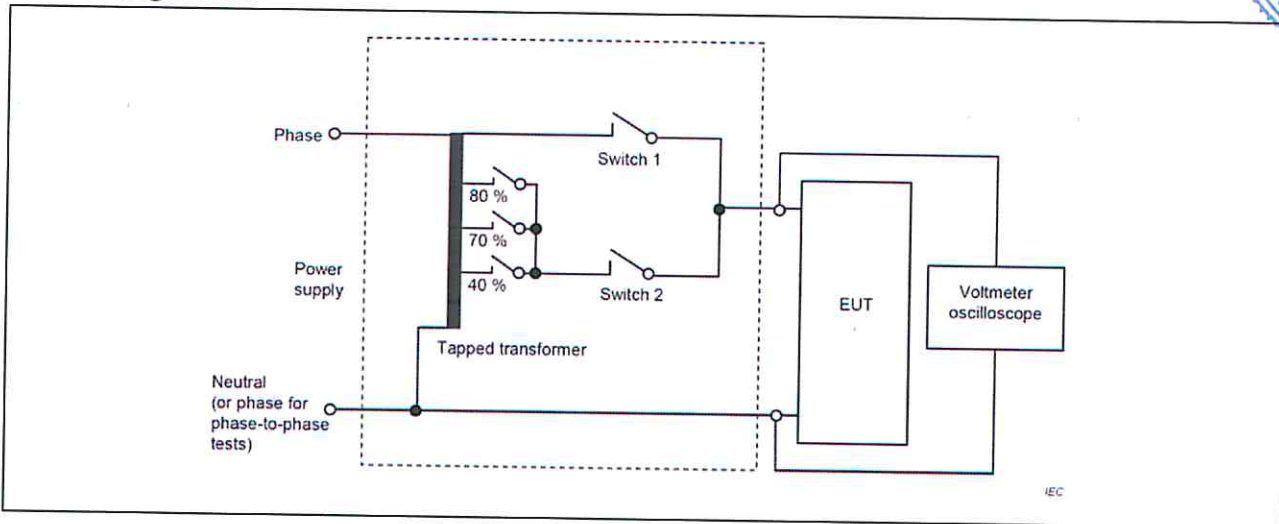

Test Results refer to Annex A.5






# ANNEX A - TEST RESULTS

## A.1. CONDUCTED DISTURBANCE TEST RESULTS

Environmental Conditions	24.0°C, 54% RH
Model	SCH-300-24
Operating mode	Mode 4 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong
Pol	Line

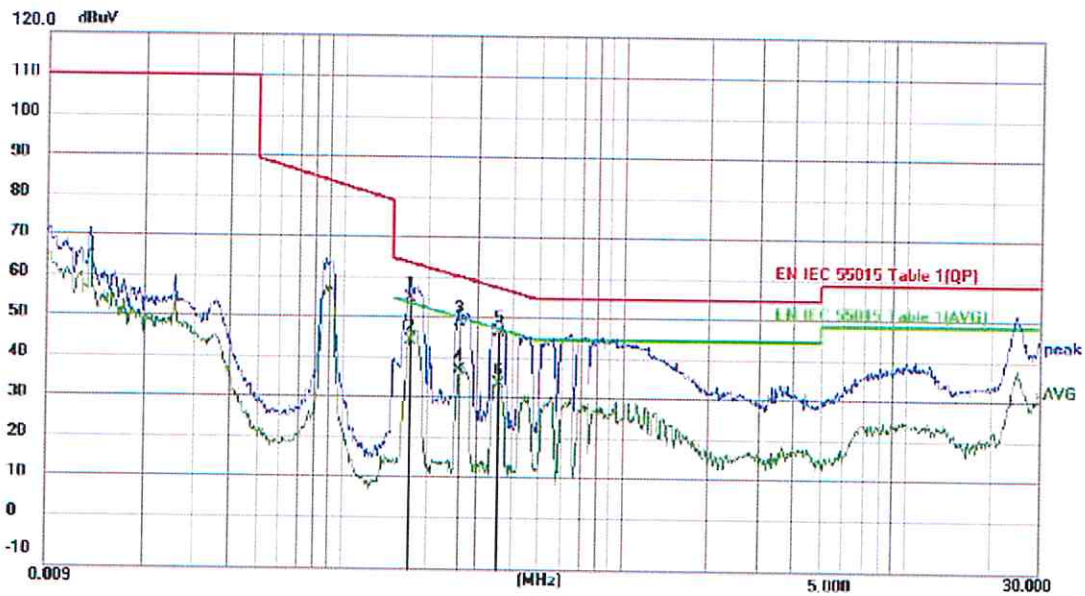

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1723	46.62	9.62	56.24	64.85	-8.61	QP	
2		0.1723	35.98	9.62	45.60	54.85	-9.25	AVG	
3		0.2580	40.63	9.62	50.25	61.50	-11.25	QP	
4		0.2580	28.81	9.62	38.43	51.50	-13.07	AVG	
5		0.3570	38.47	9.65	48.12	58.80	-10.68	QP	
6		0.3570	25.62	9.65	35.27	48.80	-13.53	AVG	


15161







Environmental Conditions	24.0°C, 54% RH
Model	SCH-300-24
Operating mode	Mode 4 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong
Pol	Neutral

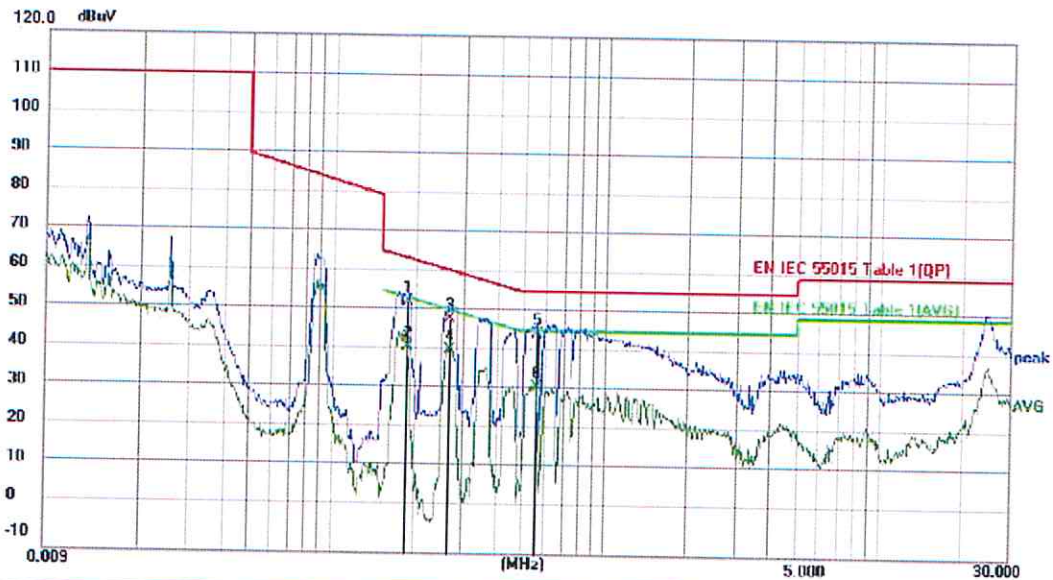

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1860	43.66	9.67	53.33	64.21	-10.88	QP	
2		0.1860	32.14	9.67	41.81	54.21	-12.40	AVG	
3		0.2670	39.49	9.65	49.14	61.21	-12.07	QP	
4	*	0.2670	31.67	9.65	41.32	51.21	-9.89	AVG	
5		0.5594	36.02	9.52	45.54	56.00	-10.46	QP	
6		0.5594	22.49	9.52	32.01	46.00	-13.99	AVG	


BC  
LCS





### A.2. RADIATED DISTURBANCE TEST RESULTS (9kHz - 30MHz)

Environmental Conditions	24.0°C, 54% RH
Model	SCH-300-24
Operating mode	Mode 4 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong
Pol	X

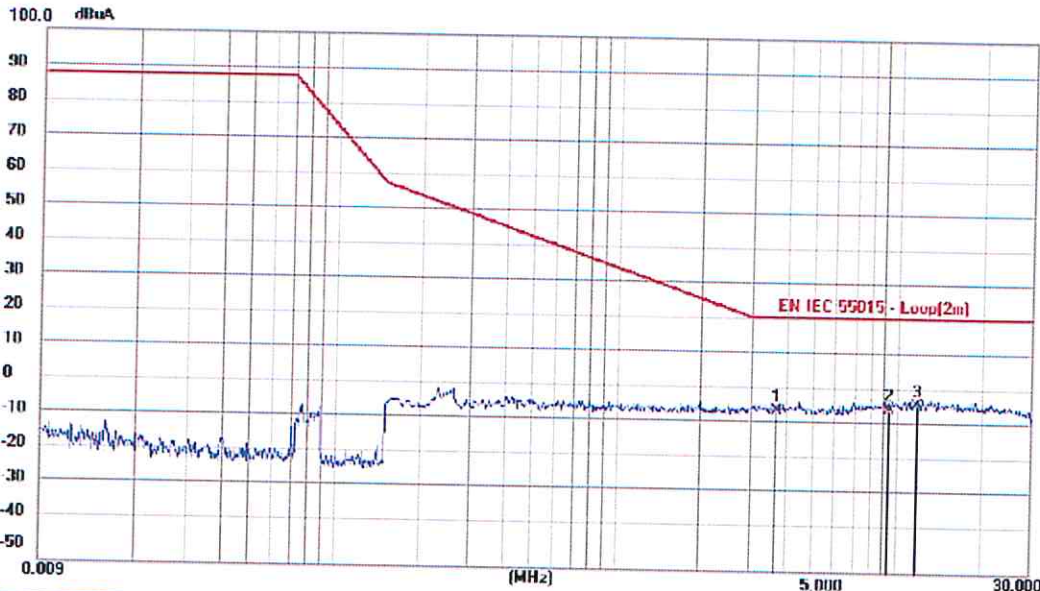

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		3.7275	-29.75	25.13	-4.62	22.00	-26.62	QP	
2		9.3073	-29.58	25.85	-3.73	22.00	-25.73	QP	
3	*	11.6654	-28.73	26.03	-2.70	22.00	-24.70	QP	


LCS







Environmental Conditions	24.0°C, 54% RH
Model	SCH-300-24
Operating mode	Mode 4 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong
Pol	Y

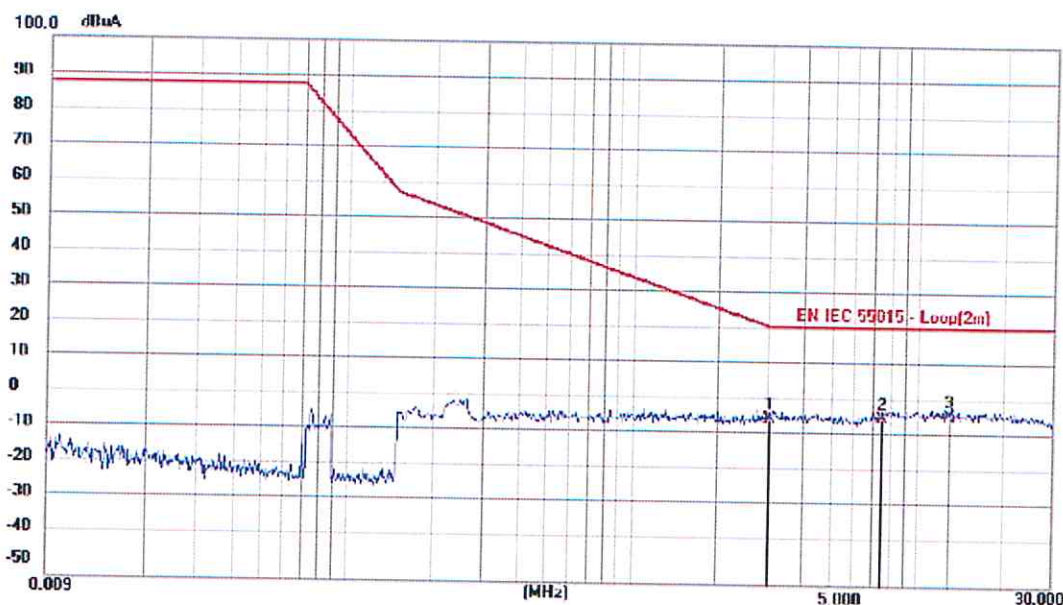


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		3.0120	-29.35	25.75	-3.60	22.00	-25.60	QP	
2		7.5300	-29.17	25.87	-3.30	22.00	-25.30	QP	
3	*	12.8850	-28.68	26.17	-2.51	22.00	-24.51	QP	

//Om'\*





Environmental Conditions	24.0°C, 54% RH
Model	SCH-300-24
Operating mode	Mode 4 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong
Pol	Z

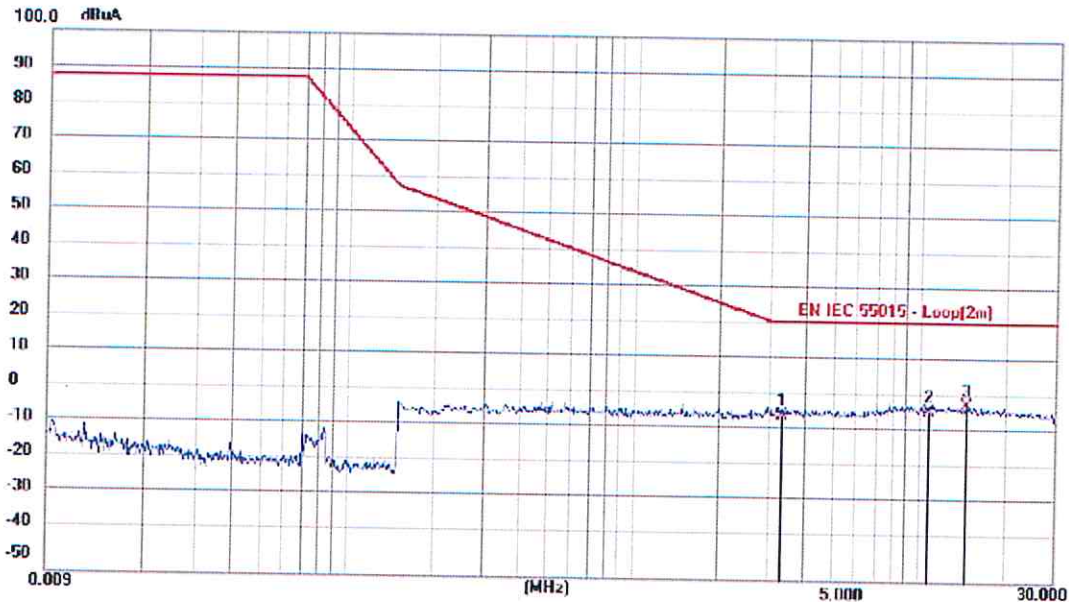

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuA	Limit dBuA	Over dB	Detector	Comment
1		3.2775	-29.17	25.02	-4.15	22.00	-26.15	QP	
2		10.8149	-28.68	26.12	-2.56	22.00	-24.56	QP	
3	*	14.4690	-26.26	25.75	-0.51	22.00	-22.51	QP	








### A.3. RADIATED DISTURBANCE TEST RESULTS (30MHz - 1GHz)

Environmental Conditions	24.2°C, 56% RH
Model	SCH-300-24
Operating mode	Mode 4 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong
Pol	Vertical

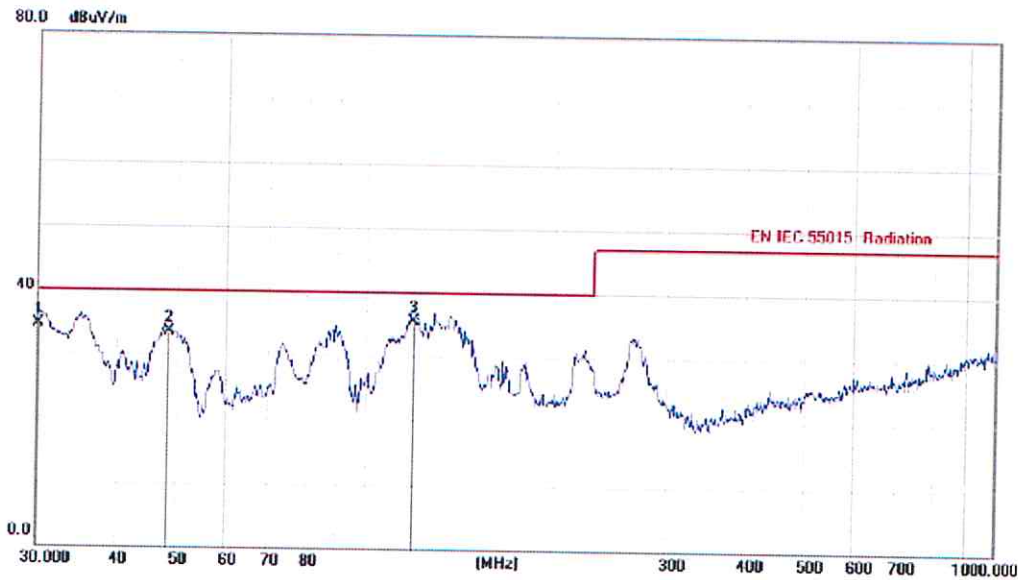


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		30.0263	24.10	10.40	34.50	40.00	-5.50	QP			
2		48.5866	21.02	12.43	33.45	40.00	-6.55	QP			
3	*	118.5494	23.88	11.60	35.48	40.00	-4.52	QP			





Environmental Conditions	24.2°C, 56% RH
Model	SCH-300-24
Operating mode	Mode 4 (worst case)
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong
Pol	Horizontal

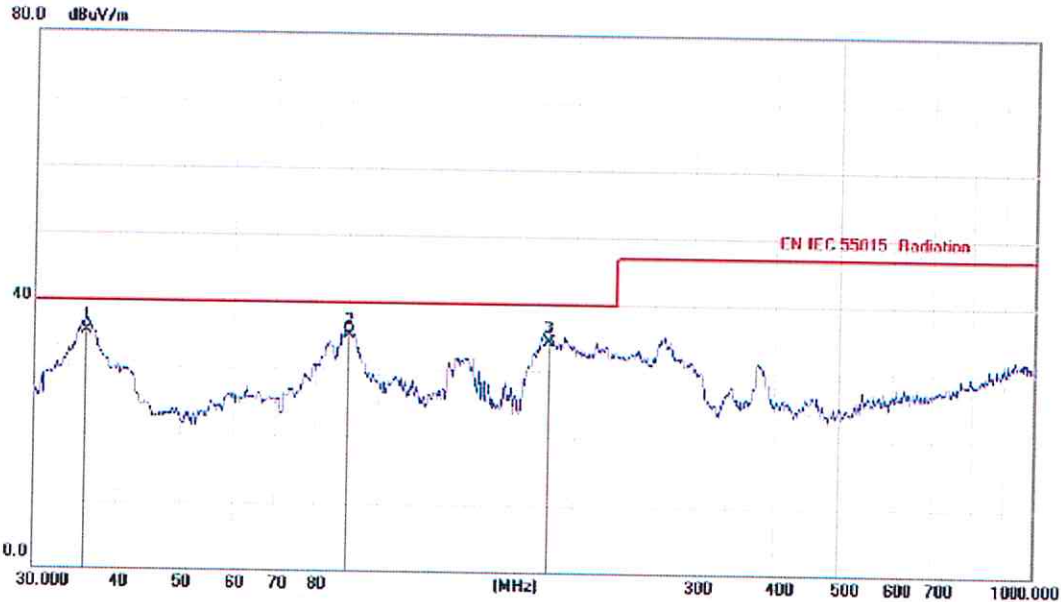

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1	*	35.9849	23.74	11.48	35.22	40.00	-4.78	QP		
2		90.1808	24.51	10.59	35.10	40.00	-4.90	QP		
3		180.6487	23.48	10.91	34.39	40.00	-5.61	QP		

LCS









### A.4. HARMONIC CURRENT TEST RESULTS

Model	SCH-300-24
Operating mode	Mode 4
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong

Test Result: **pass**      Source qualification(Power Off Load): **Idle - Pass**  
Current & voltage waveforms

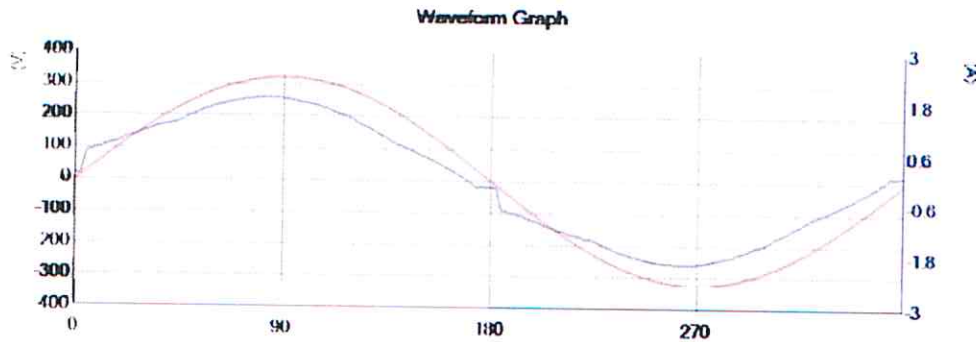

Harmonics and Class C limit line (>25W)

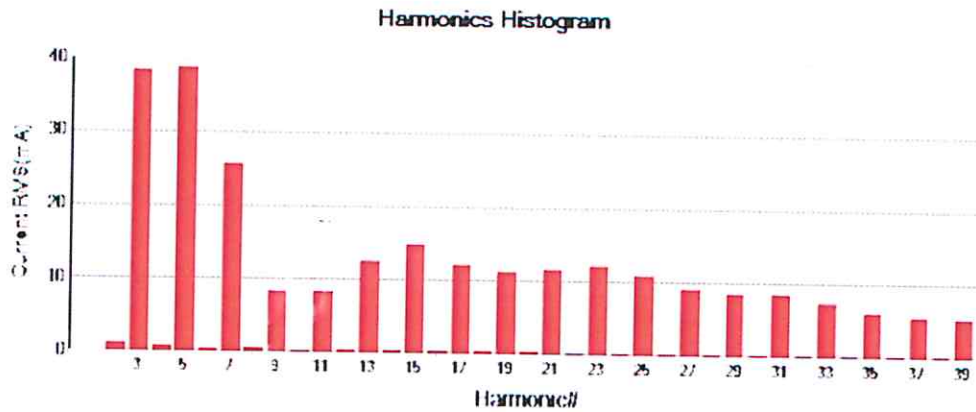

BC  
CE  
TE





Model	SCH-300-24
Operating mode	Mode 4
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong

Test Result: **pass**      Source qualification(Power Off Load): **Idle - Pass**  
 THC(mA): 72.400      I - THD(%): 5.5      POHC(mA):28.500      POHC Limit(mA):125.625

Parameter values during test:  
 V\_RMS (Volts): 229.9      Frequency(Hz): 50.0  
 I\_RMS(mA): 1326.7      Crest Factor: 1.469  
 Power (Watts): 300.3      Power Factor: 0.985

Harm#	Harms(filtered) (mA)	Limit (mA)	Harms(avg) (mA)	100%Limit	Harms(max) (mA)	150%Limit	Status
I_Fund	1324.200						
2	1.200	26.484	1.000	3.776	1.300	3.272	Pass
3	38.400	357.534	38.000	10.628	38.500	7.179	Pass
4	0.700	-	0.800	-	1.000	-	N/A
5	38.800	132.420	39.100	29.527	39.600	19.937	Pass
6	0.400	-	0.500	-	0.600	-	N/A
7	25.500	92.694	25.700	27.726	26.000	18.700	Pass
8	0.500	-	0.500	-	0.600	-	N/A
9	8.300	66.210	8.500	12.838	8.500	8.559	Pass
10	0.100	-	0.200	-	0.300	-	N/A
11	8.300	39.726	8.400	21.145	8.400	14.097	Pass
12	0.400	-	0.500	-	0.500	-	N/A
13	12.700	39.726	12.800	32.221	12.800	21.480	Pass
14	0.300	-	0.400	-	0.400	-	N/A
15	14.800	39.726	14.800	37.255	14.900	25.005	Pass
16	0.300	-	0.300	-	0.300	-	N/A
17	12.200	39.726	12.200	30.710	12.300	20.641	Pass
18	0.300	-	0.300	-	0.300	-	N/A
19	11.200	39.726	11.200	28.193	11.400	19.131	Pass
20	0.300	-	0.300	-	0.300	-	N/A
21	11.600	39.726	11.700	29.452	11.700	19.635	Pass
22	0.200	-	0.200	-	0.300	-	N/A
23	12.300	39.726	12.400	31.214	12.400	20.809	Pass
24	0.200	-	0.200	-	0.200	-	N/A
25	10.700	39.726	10.800	27.186	10.800	18.124	Pass
26	0.100	-	0.200	-	0.200	-	N/A
27	9.100	39.726	9.200	23.159	9.300	15.607	Pass
28	0.100	-	0.200	-	0.200	-	N/A
29	8.600	39.726	8.700	21.900	8.700	14.600	Pass
30	0.100	-	0.200	-	0.200	-	N/A
31	8.500	39.726	8.600	21.648	8.700	14.600	Pass
32	0.100	-	0.200	-	0.200	-	N/A
33	7.500	39.726	7.600	19.131	7.600	12.754	Pass
34	0.100	-	0.200	-	0.200	-	N/A
35	6.200	39.726	6.300	15.859	6.300	10.572	Pass
36	0.100	-	0.200	-	0.200	-	N/A
37	5.500	39.726	5.600	14.097	5.700	9.566	Pass
38	0.100	-	0.100	-	0.100	-	N/A
39	5.300	39.726	5.400	13.593	5.300	8.894	Pass
40	0.100	-	0.100	-	0.100	-	N/A

Note: All harmonics are below the minimum limits and are ignored.







Model	SCH-300-24
Operating mode	Mode 4
Test voltage	AC 230V,50Hz
Test engineer	Peng Dong

Source qualification(Power Off Load): **Pass**

Measurements are compliant with IEC/EN61000-3-2 Ed. 4 & IEC/EN61000-4-7 Ed. 2.1

	Nominal	Measured		Deviation	Allowed Deviation	Result
		Low	High			
Supply Voltage	230	229.73	229.88	-0.27	4.6	Pass
Supply Frequency	50	50.0	50.0	0.0	0.25	Pass
Crest Phase	90.0	89.6	89.8	-0.4	3.0	Pass
Crest Factor	1.414	1.414	1.415	0.001	-0.014/0.006	Pass
Fundamental Voltage	229.75	-	-	-	-	-

Harm#	Harmonics Voltage	Harmonic Ratio	Limit	Result
2	0.090	0.048	0.200	Pass
3	0.130	0.073	0.900	Pass
4	0.030	0.029	0.200	Pass
5	0.050	0.030	0.400	Pass
6	0.020	0.016	0.200	Pass
7	0.020	0.018	0.300	Pass
8	0.010	0.008	0.200	Pass
9	0.010	0.010	0.200	Pass
10	0.020	0.010	0.100	Pass
11	0.020	0.015	0.100	Pass
12	0.000	0.003	0.100	Pass
13	0.010	0.008	0.100	Pass
14	0.000	0.003	0.100	Pass
15	0.010	0.008	0.100	Pass
16	0.000	0.003	0.100	Pass
17	0.010	0.004	0.100	Pass
18	0.000	0.001	0.100	Pass
19	0.010	0.010	0.100	Pass
20	0.000	0.003	0.100	Pass
21	0.010	0.005	0.100	Pass
22	0.000	0.000	0.100	Pass
23	0.010	0.005	0.100	Pass
24	0.000	0.000	0.100	Pass
25	0.010	0.005	0.100	Pass
26	0.000	0.000	0.100	Pass
27	0.010	0.005	0.100	Pass
28	0.000	0.000	0.100	Pass
29	0.000	0.003	0.100	Pass
30	0.000	0.000	0.100	Pass
31	0.010	0.005	0.100	Pass
32	0.000	0.000	0.100	Pass
33	0.010	0.004	0.100	Pass
34	0.000	0.000	0.100	Pass
35	0.010	0.005	0.100	Pass
36	0.000	0.000	0.100	Pass
37	0.000	0.005	0.100	Pass
38	0.000	0.000	0.100	Pass
39	0.000	0.003	0.100	Pass
40	0.000	0.000	0.100	Pass

LCSB050523038E001





### A.5. IMMUNITY TEST RESULTS

ELECTROSTATIC DISCHARGE IMMUNITY TEST RESULTS					
Standard	<input checked="" type="checkbox"/> EN 61547:2009		<input checked="" type="checkbox"/> EN 61000-4-2		
EUT	LED Power Supply	Temperature	23.2°C		
M/N	SCH-300-24	Humidity	50%		
Test Mode	MODE 4	Pressure	1008mbar		
Input voltage	AC 230V,50Hz	Test Results	Pass		
Test engineer	Peng Dong				
Discharge Mode	Test Points	Test Voltage (kV) & polarity	Number of discharges/polarity	Discharge interval (s)	Performance Criteria
Contact Discharge	Conductive surfaces	± 2&4	10	1	B
Air Discharge	Insulating surfaces	± 2&4&8	10	1	B
VCP	-	± 4	10	1	B
HCP	-	± 4	10	1	B
Note :					







### RADIO-FREQUENCY ELECTROMAGNETIC FIELD IMMUNITY TEST RESULTS

Standard	<input checked="" type="checkbox"/> EN 61547:2009		<input checked="" type="checkbox"/> EN 61000-4-3	
EUT	LED Power Supply	Temperature	24.1°C	
M/N	SCH-300-24	Humidity	55%	
Test Mode	MODE 4	Pressure	1008mbar	
Input voltage	AC 230V,50Hz	Test engineer	Baron wen	
Modulation	1 kHz, 80 % AM	Test Results	Pass	
Steps	1%			
Angle of EUT	Antenna polarization	Frequency Range	Test Level	Performance Criteria
0°	Vertical Horizontal	80 - 1000 MHz	3 V/m	A
90°	Vertical Horizontal	80 - 1000 MHz	3 V/m	A
180°	Vertical Horizontal	80 - 1000 MHz	3 V/m	A
270°	Vertical Horizontal	80 - 1000 MHz	3 V/m	A
Note :				





### ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST RESULTS

Standard	<input checked="" type="checkbox"/> EN 61547:2009		<input checked="" type="checkbox"/> EN 61000-4-4	
EUT	LED Power Supply	Temperature	23.9℃	
M/N	SCH-300-24	Humidity	52%	
Test Mode	MODE 4	Pressure	1008mbar	
Input voltage	AC 230V,50Hz	Test Results	Pass	
Test engineer	Peng Dong			
Port under test	Test Level & polarity	Repetition Frequency	Test duration / polarity	Performance Criteria
AC Input / Output Power	± 1 kV	5 kHz	2min	B
DC Input / Output Power				
Signal / Control Port				

Note:

1515151







### INJECTED CURRENTS (RADIO-FREQUENCY COMMON MODE) TEST RESULTS

Standard	<input checked="" type="checkbox"/> EN 61547:2009		<input checked="" type="checkbox"/> EN 61000-4-6	
EUT	LED Power Supply	Temperature	24.1°C	
M/N	SCH-300-24	Humidity	54%	
Test Mode	MODE 4	Pressure	1008mbar	
Input voltage	AC 230V,50Hz	Test Results	Pass	
Frequency range	0,15 - 80 MHz	Test engineer	Peng Dong	
Port under test	Test Level	Coupling method	Dwell time	Performance Criteria
AC Input / Output Power	3 V	CDN	3 seconds	A
DC Input / Output Power				
Signal / Control Port				

BC  
LCS  
/E





SURGE IMMUNITY TEST RESULTS						
Standard	<input checked="" type="checkbox"/> EN 61547:2009		<input checked="" type="checkbox"/> EN 61000-4-5			
EUT	LED Power Supply		Temperature	23.9°C		
M/N	SCH-300-24		Humidity	52%		
Test Mode	MODE 4		Pressure	1008mbar		
Input voltage	AC 230V,50Hz		Test Results	Pass		
Test engineer	Peng Dong					
Port under test	Coupling	Test Level & polarity(kV)	Phase angle (°)	Number of surges	Repetition rate(s)	Performance criteria
AC Input power	L - N	+ 1	90	5	60	C
		- 1	270	5	60	C
AC Input power	L - PE	+ 2	90	5	60	C
		- 2	270	5	60	C
AC Input power	N - PE	+ 2	90	5	60	C
		- 2	270	5	60	C
AC Input power	L&N - PE	+ 2	90	5	60	C
		- 2	270	5	60	C
Note:						

LCSB050523038E001







### VOLTAGE DIPS AND SHORT INTERRUPTIONS IMMUNITY TEST RESULTS

Standard	<input checked="" type="checkbox"/> EN 61547:2009		<input checked="" type="checkbox"/> EN 61000-4-11		
EUT	LED Power Supply		Temperature	23.9°C	
M/N	SCH-300-24		Humidity	52%	
Test Mode	MODE 1		Pressure	1008mbar	
Input voltage	AC 277V,50Hz, AC120V,60Hz		Test Results	Pass	
Test engineer	Peng Dong				
U <sub>NOM</sub> (Vac)	Test Level (% U <sub>NOM</sub> )	Number of periods		Phase angle (°)	Performance criteria
		50Hz	60Hz		
230	70	10	12	0, 90, 180, 270	C
230	0	0,5	0,5	0	B


Note:

LCS



## ANNEX B - TEST PHOTOS

### B.1. Conducted Disturbance at electric power supply

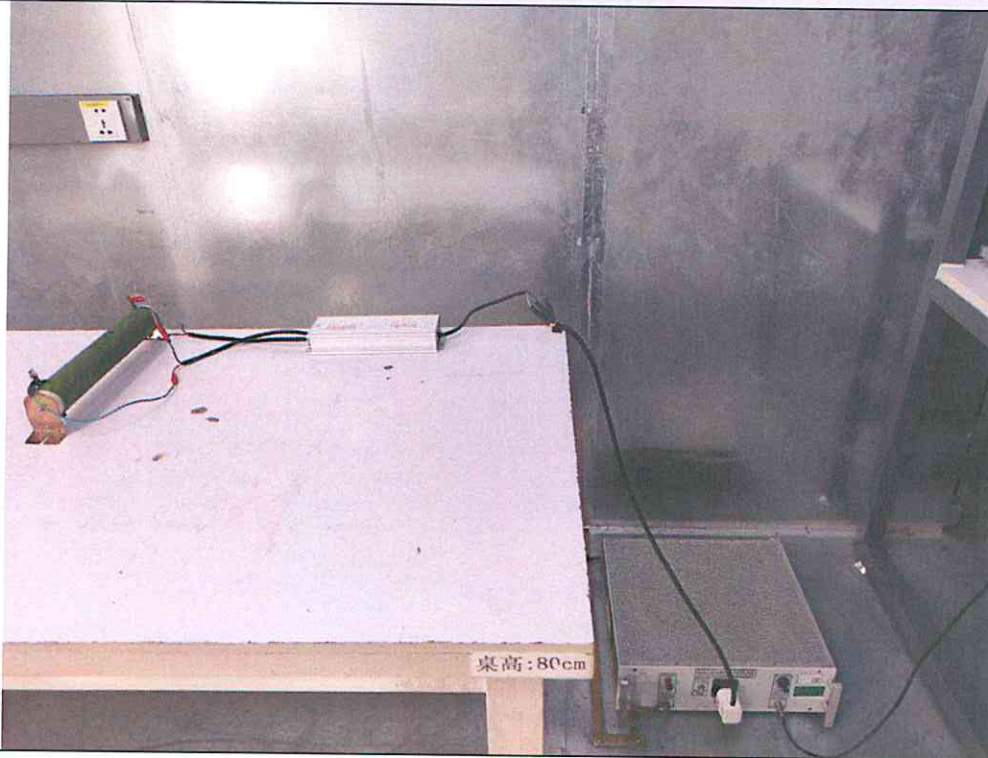


### B.2. Radiated Disturbance (9kHz - 30MHz)





### B.3. Radiated Disturbance (30MHz to 1GHz)

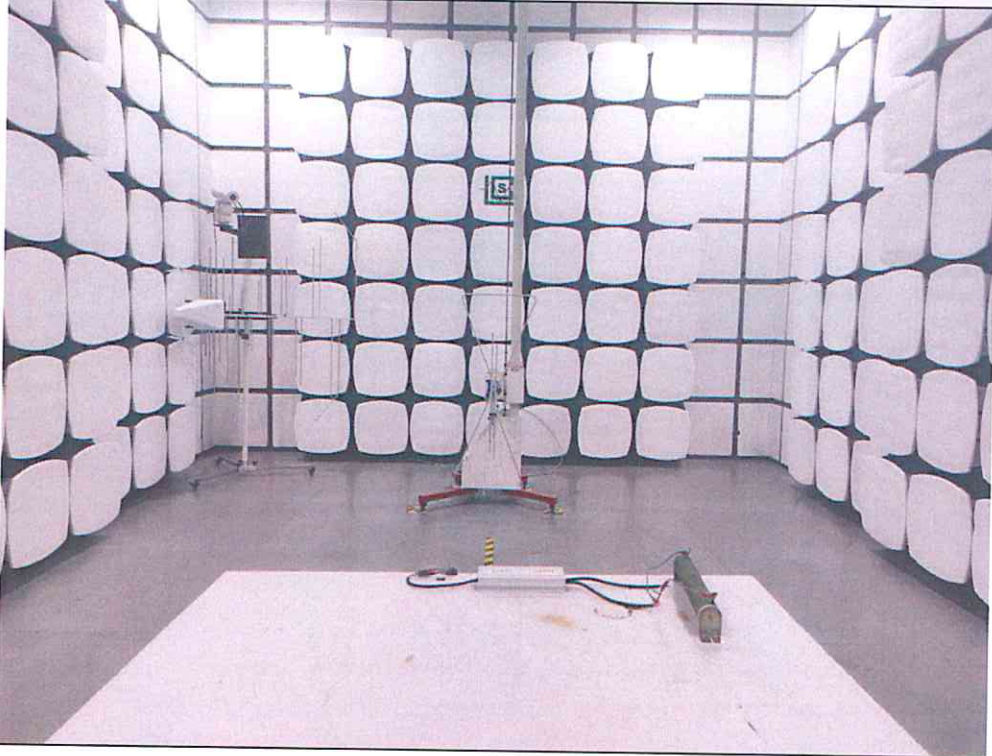

### B.4. Harmonic Current






### B.5. Electrostatic Discharge




立讯检测


### B.6. Electrical Fast Transient / Burst

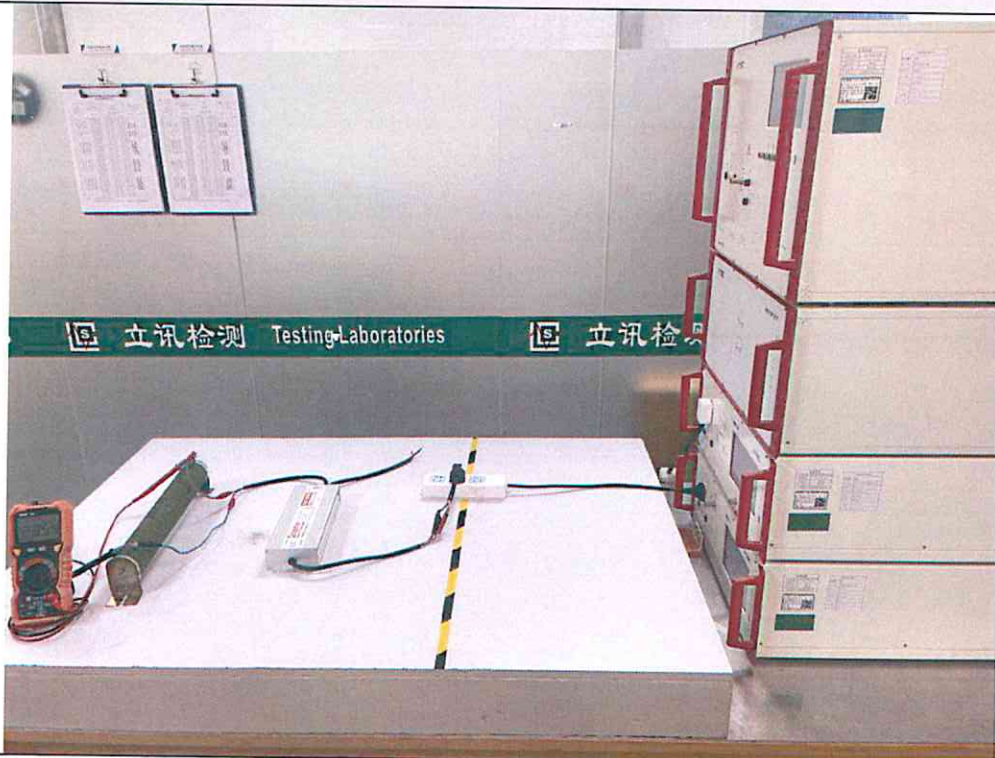

### B.7. Injected Currents (Radio-Frequency Common Mode)

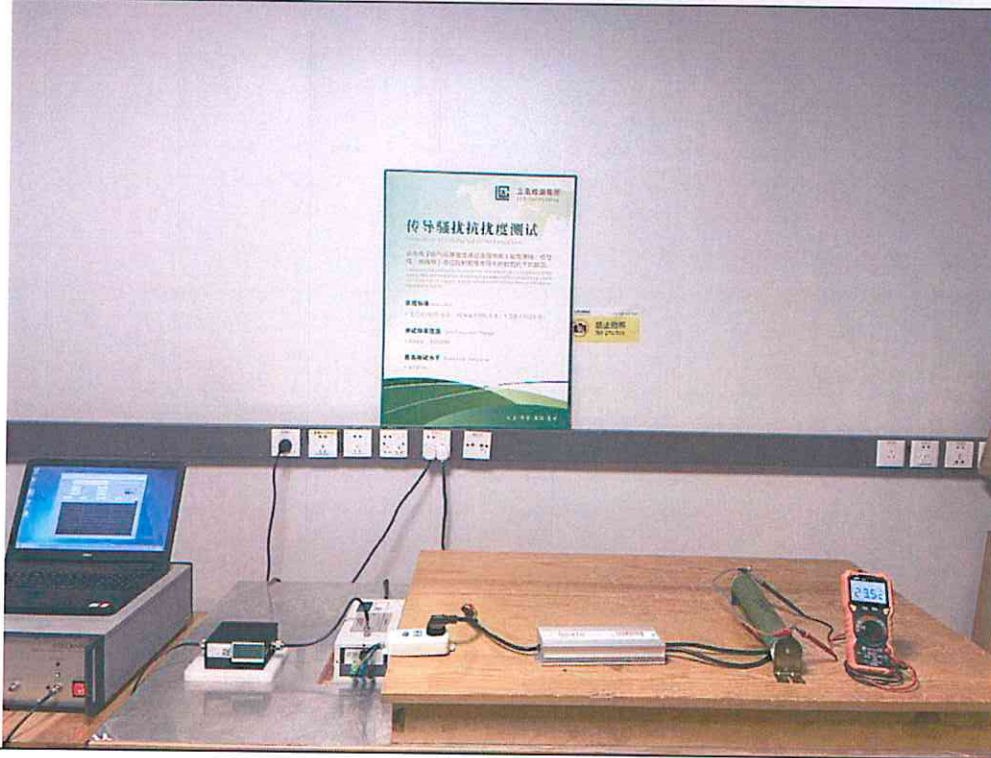

### B.8. Surge

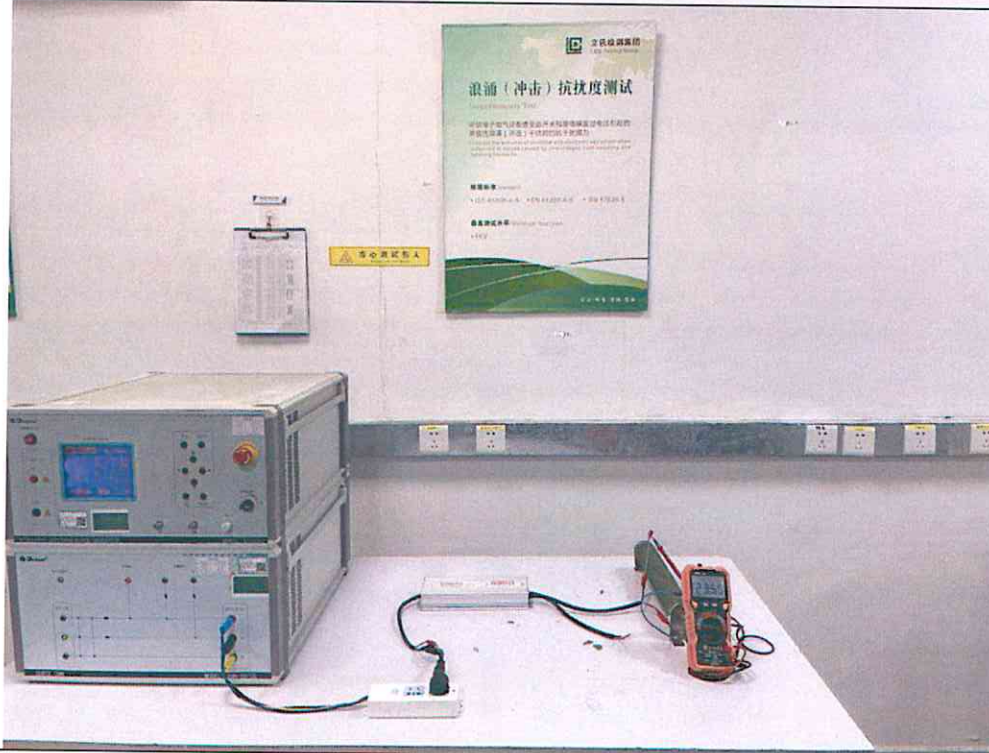

BC  
E





### B.9. Voltage Dips and Short Interruptions



## ANNEX C - EXTERNAL AND INTERNAL PHOTOS OF THE EUT

The photographs show the equipment under test.

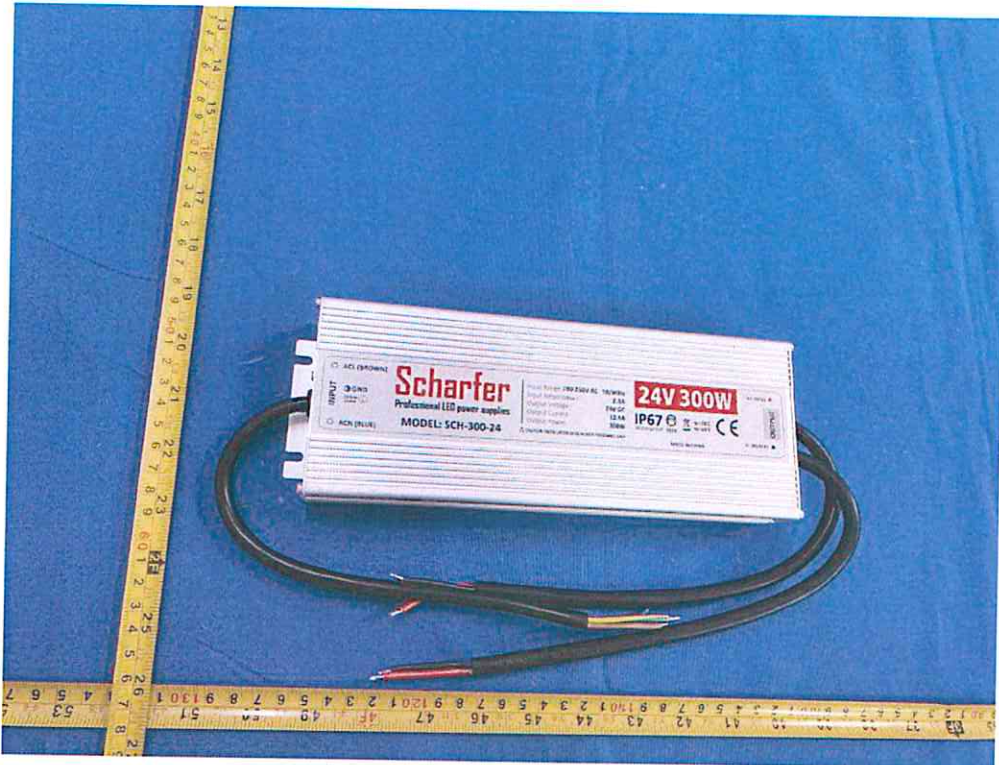


Figure. 1

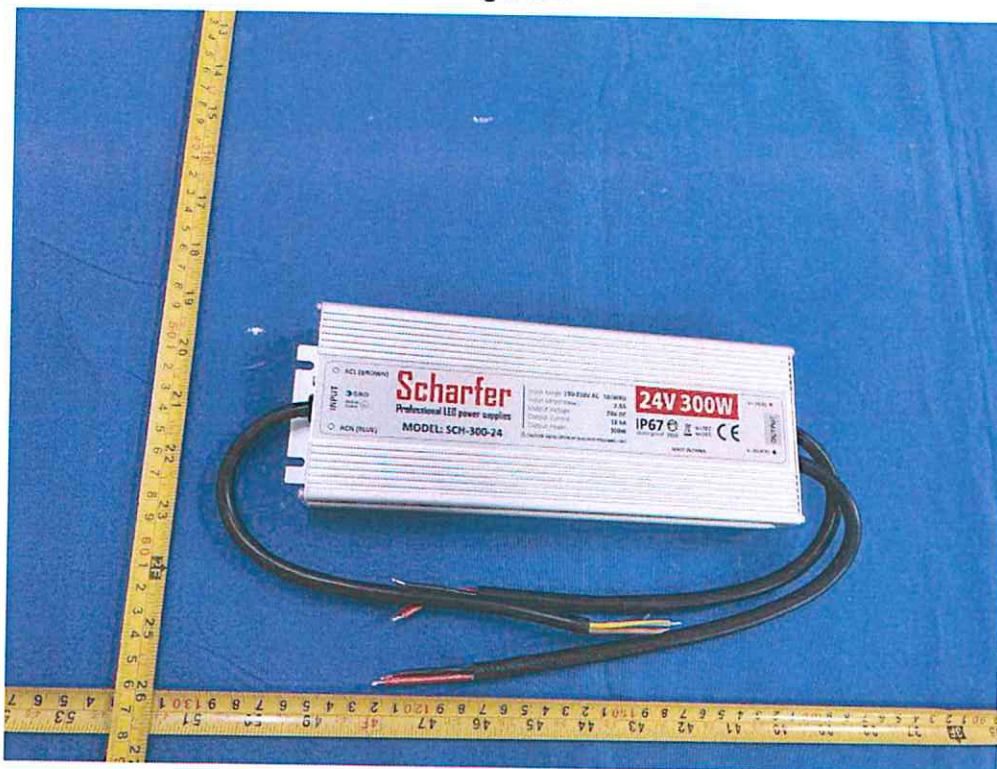


Figure. 2





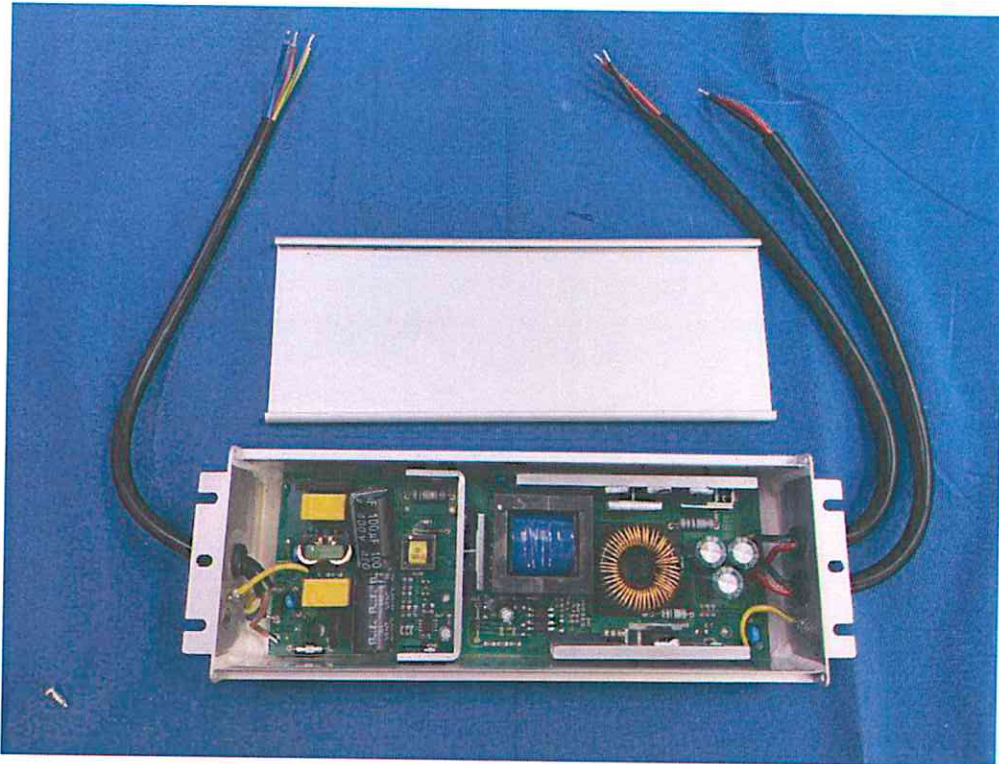


Figure. 3

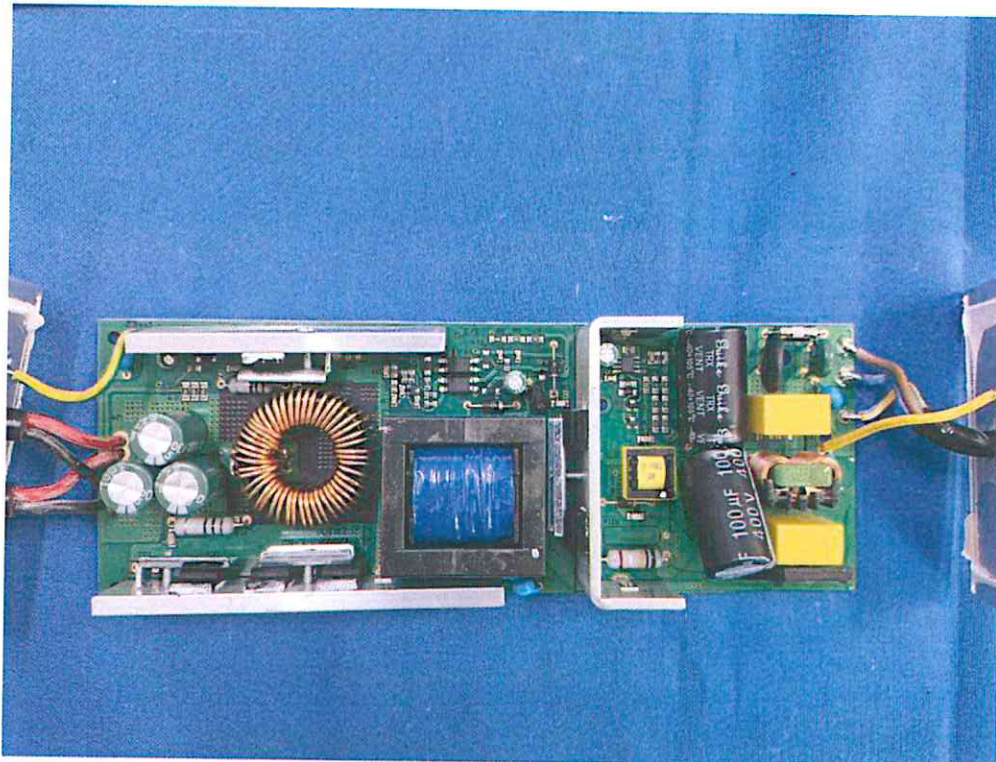


Figure. 4



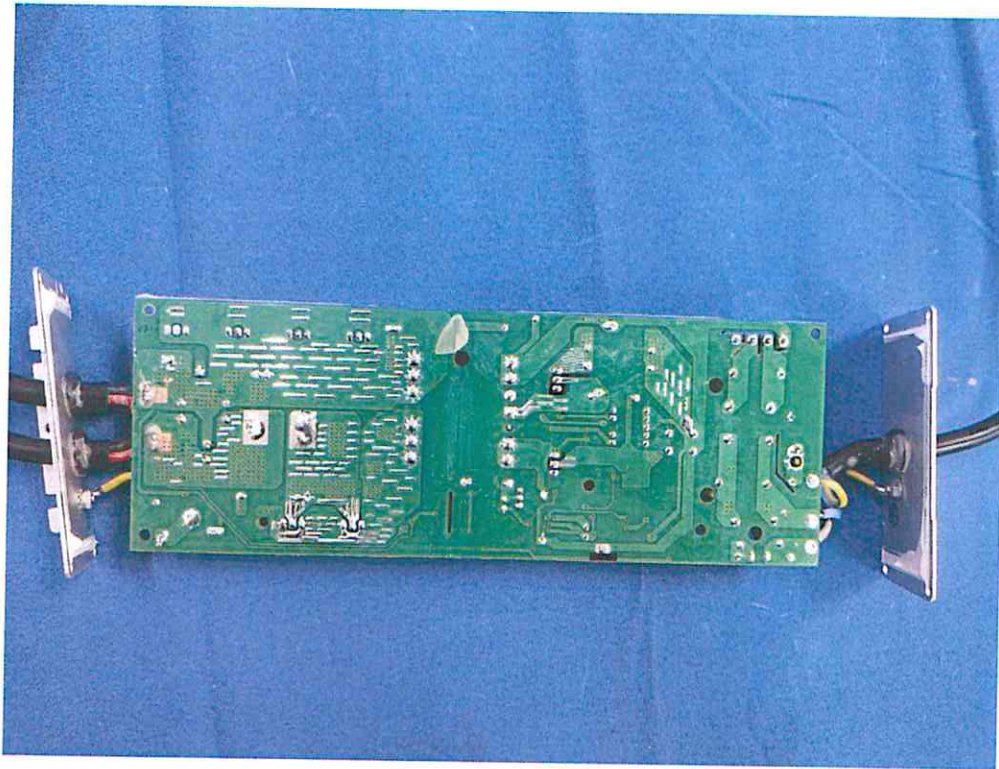


Figure. 5

----- END -----

